PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :		(11) International Publication Number:	WO 93/17388
G06F 12/14, 7/04, 3/06	A1	(43) International Publication Date:	2 September 1993 (02.09.93)

(21) International Application Number: PCT/US93/01675

(22) International Filing Date: 26 February 1993 (26.02.93)

(30) Priority data:
07/841,814 26 February 1992 (26.02.92) US

(71)(72) Applicant and Inventor: CLARK, Paul, C. [US/US]; 4705 Broad Brook Drive, Bethesda, MD 20814 (US).

(74) Agents: LIPMAN, Steven, E. et al.; Fish & Richardson, 601 13th Street, N.W., Suite 500N, Washington, DC 20005 (US).

(81) Designated States: AU, CA, JP, KR, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: SYSTEM FOR PROTECTING COMPUTERS VIA INTELLIGENT TOKENS OR SMART CARDS

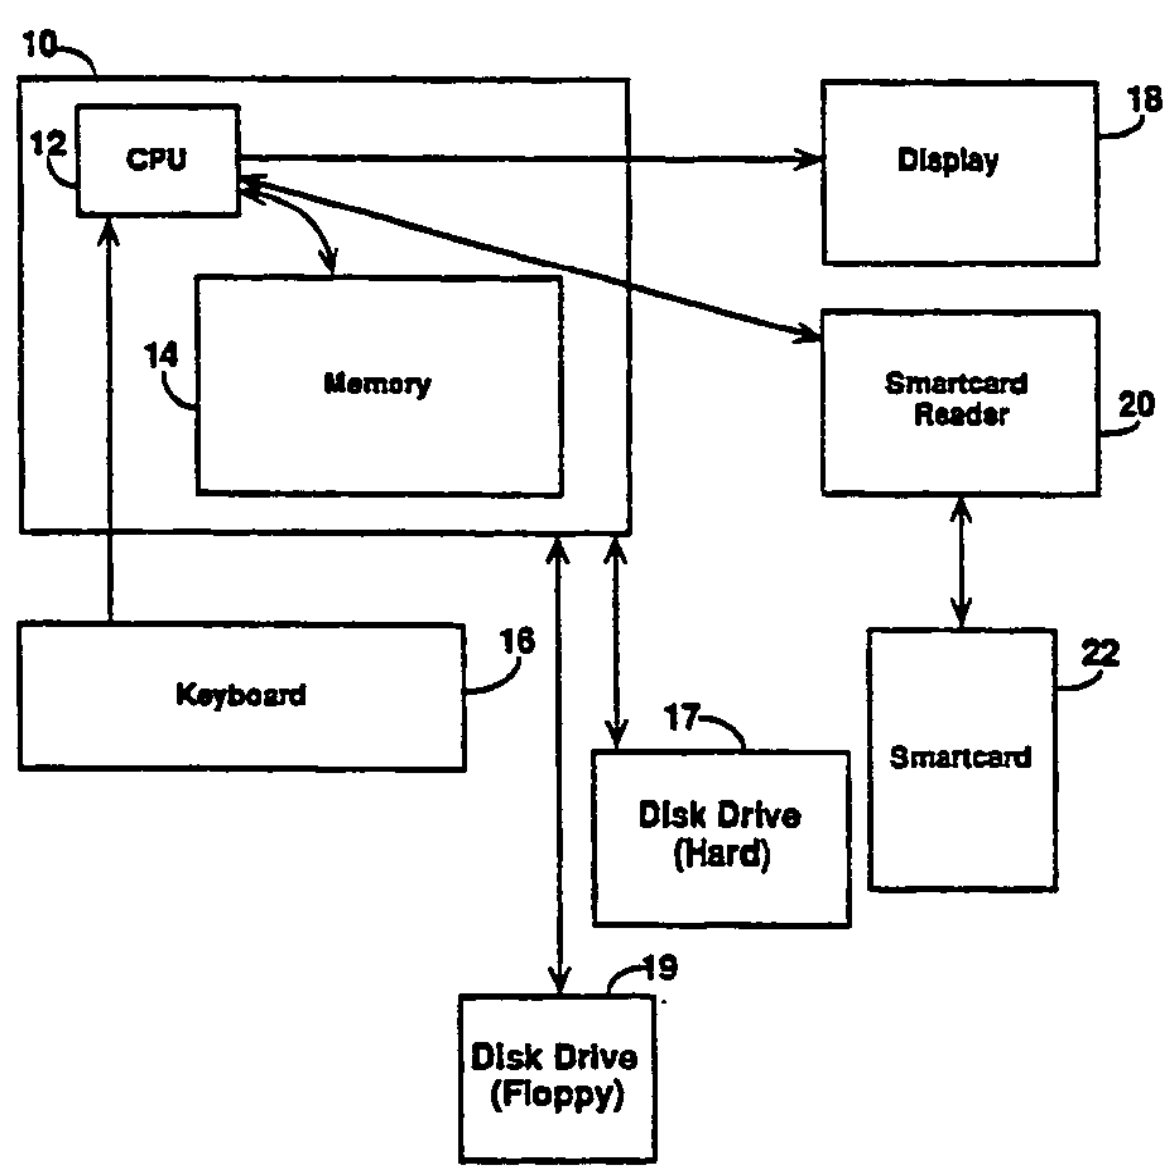

(57) Abstract

The possibility of corruption of critical information required in the operation of a host computer (10) is reduced by storing the critical information in a device (22); communicating authorization information between the device (22) and the host computer (10); and causing the device (22), in response to the authorization information, to enable the host computer (10) to read the critical information stored in the device (22). The device (22) includes a housing, a memory (36) within the housing containing information needed for startup of the host computer (10), and communication channel for allowing the memory (36) to be accessed externally of the housing. The device (22) is initialized by storing the critical information in memory (36) on the device (22), storing authorization information in memory (36) on the device (22), and configuring a microprocessor (34) in the device (22) to release the critical information to the host computer (10) only after completing an authorization routine based on the authorization information.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo			SE	Sweden
CH	Switzerland	KR	Republic of Korea	SK	Slovak Republic
CI	Côte d'Ivoire	KZ	Kazakhstan	SN	Senegal
CM	Cameroon	LI	Liechtenstein	SU	Soviet Union
CS	Czechoslovakia	LK	Sri Lanka	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	UA	Ukraine
DK	Denmark	MG	Madagascar	US	United States of America
ES	Spain	ML	Mali	VN	Viet Nam
FI	Finland	MN	Mongolia		

SYSTEM FOR PROTECTING COMPUTERS VIA INTELLIGENT TOKENS OR SMART CARDS

Background of the Invention

This invention relates to reducing the possibility of corruption of critical information required in the operation of a computer system. In particular, the invention is aimed at preventing boot-sector computer viruses and protecting critical executable code from virus infection.

The process of starting up a computer, i.e., booting or boot-strapping a computer is well known, but we describe aspects of it here for the sake of clarity and in order to define certain terms and outline certain problems which are solved by this invention.

Fig. 1 depicts a typical computer system 10 with central processing unit (CPU) 12 connected to memory 14. Display 18, keyboard 16, hard disk drive 17, and floppy disk drive 19 are connected to computer system 10.

A typical computer system such as shown in Fig. 1 uses a program or set of programs called an operating system (OS) as an interface between the underlying hardware of the system and its users. A typical OS, e.g., MS-DOS Version 5.0, is usually divided into at least two parts or levels. The first level of the OS, often referred to as the kernel of the OS, provides a number of low-level functions called OS primitives which interact directly with the hardware. These low-level primitives include, for example, functions that provide the basic interface programs to the computer system's keyboard 16, disk drives 17, 19, display 18, and other attached hardware devices. The OS primitives also include programs that control the execution of other programs, e.g., programs that load and initiate the execution of other programs. Thus, for example, if a

user wishes to run a word-processing program or a game program, it is the primitives in the OS kernel which load the user's program from a disk in one of the attached disk drives 17, 19 into the computer system's memory 14 and begins executing it on CPU 12.

The second level of the OS typically consists of a number of executable programs that perform higher-level (at least from a user's perspective) system related tasks, e.g., creating, modifying, and deleting computer files, reading and writing computer disks or tapes, displaying data on a screen, printing data, etc. These second-level OS programs make use of the kernel's primitives to perform their tasks. A user is usually unaware of the difference between the kernel functions and those which are performed by other programs.

A third level of the OS, if it exists, might relate to the presentation of the OS interface to the user. Each level makes use of the functionality provided by the previous levels, and, in a well designed system, each level uses only the functionality provided by the immediate previous level, e.g., in a four level OS, level 3 only uses level 2 functions, level 2 only uses level 1 functions, level 1 only uses level 0 functions, and level 0 is the only level that uses direct hardware instructions.

Fig. 2 depicts an idealized view of a four level OS, with a level for hardware (level 0) 2, the kernel (level 1) 4, the file system (level 2) 6, and the user interface (level 3) 8.

An OS provides computer users with access and interface to a computer system. Operating systems are constantly evolving and developing to add improved features and interfaces. Furthermore, since an OS is merely a collection of programs (as described above), the same computer system, e.g. that shown in Fig. 1, can have

a different OS running on it at different times. For example, the same IBM personal computer can run a command-line based OS, e.g., MS-DOS V5.0, or a graphical, icon based OS, e.g., MS-Windows 3.0.

In order to deal with the evolution of operating systems (as well as to deal possible errors in existing operating systems) computer system manufacturers have developed a multi-stage startup process, or boot process, for computers. Rather than build a version of the OS into the system, the multi-stage boot process works as follows:

A boot program is built into the computer system and resides permanently in read-only memory (ROM) or programmable read-only memory (PROM) (which is part of memory 14) on the system. Referring to Fig. 4, a computer system's memory 14 can consist of a combination of Random Access Memory (RAM) 24 and ROM 26. The ROM (or PROM) containing the boot program is called the boot ROM 28 (or boot PROM). A boot program is a series of very basic instructions to the computer's hardware that are initiated whenever the computer system is powered up (or, on some systems, whenever a certain sequence of keys or buttons are pressed). The specific function of the boot program is to locate the OS, load it into the computer's memory, and begin its execution. These boot programs include the most primitive instructions for the machine to access any devices attached to it, e.g., the keyboard, the display, disk drives, a CD-ROM drive, a mouse, etc.

To simplify boot programs and to make their task of locating the OS easy, most computer system manufacturers adopt conventions as to where the boot program is to find the OS. Two of these conventions are: the OS is located in a specific location on a disk, or the OS is located in a specific named file on a disk. The latter approach is adopted by the Apple Macintosh™

computer where the boot program looks for a file named "System" (which contains, e.g., Apple's icon-based graphical OS) on disks attached to the computer. The former approach, i.e., looking for the OS in a particular location, e.g., on a disk, is the one currently used by most I.B.M. personal computers (and clones of those systems). In these systems the boot program looks, in a predetermined order, for disks in the various disk drives connected to the system (many computer systems today have a number of disk drives, e.g., a floppy-disk drive, a CD-ROM, and a hard-disk drive). Once the boot program finds a disk in a disk drive, it looks at a particular location on that disk for the OS. That location is called the <u>boot sector</u> of the disk.

Referring to Fig. 3, a physical disk 9 is divided into tracks which are divided up into sectors 11 (these may actually be physically marked, e.g., by holes in the disk, in which case they are called hard-sectored, but more typically the layout of a disk is a logical, i.e. abstract layout). The <u>boot sector</u> is always in a specific sector on a disk, so the boot program knows where to look for it. Some systems will not allow anything except an OS to be written to the boot sector, others assume that the contents of the boot sector could be anything and therefore adopt conventions, e.g., a signature in the first part of the boot sector, that enables the boot program to determine whether or not it has found a boot sector with an OS. If not it can either give up and warn the user or it can try the next disk drive in its predetermined search sequence.

Once the boot program has determined that it has found a boot sector with an OS (or part of an OS), it loads (reads) into memory 14 the contents of the boot sector and then begins the execution of the OS it has just loaded. When the OS begins execution it may try to

locate more files, e.g., the second level files described above, before it allows the user access to the system. For example, in a DOS-based system, the program in the boot sector, when executed, will locate, load into memory, and execute the files, IO.SYS, MSDOS.SYS, COMMAND.COM, CONFIG.SYS, and AUTOEXEC.BAT. (Similarly, in a multi-level system, each level loads the next one, e.g., the Hewlett-Packard Unix™-like System HPUX has at least 4 levels which get loaded before the user is presented with an interface to the computer system.)

The process of booting a computer system is sometimes called the <u>boot sequence</u>. Sometimes the boot sequence is used to refer only to the process executed by the first boot program.

Computer viruses aimed at personal computers (PCs) have proliferated in recent years. One class of PC viruses is known as <u>boot infectors</u>. These viruses infect the boot-sectors of floppy or hard disks in such a way that when the boot sequence of instructions is initiated, the virus code is loaded into the computer's memory. Because execution of the boot sequence precedes execution of all application programs on the computer, antiviral software is generally unable to prevent execution of a boot-sector virus.

Recall, from the discussion above, that the boot program loads into memory the code it finds in the boot sector as long as that code appears to the boot program to be valid.

In addition to the boot infector class of viruses, there is another class of viruses called <u>file infectors</u> which infect executable and related (e.g., overlay) files. Each class of virus requires a different level or mode of protection.

File infector viruses typically infect executable code (programs) by placing a copy of themselves within

the program; when the infected program is executed so is the viral code. In general, this type of virus code spreads by searching the computer's file system for other executables to infect, thereby spreading throughout the computer system.

One way that boot-sector viruses are spread is by copying themselves onto the boot-sectors of all disks used with the infected computers. When those infected disks are subsequently used with other computers, as is often the case with floppy disks, they transfer the infection to the boot-sectors of the disks attached to other machines. Some boot-sector viruses are also file infectors. These viruses copy themselves to any executable file they can find. In that way, when the infected file is executed it will infect the boot sectors of all the disks on the computer system on which it is running.

Recall, from the discussion above, that an OS may consist of a number of levels, some of which are loaded from a boot sector, and others of which may be loaded into the system from other files on a disk. It is possible to infect an OS with a virus by either infecting that part of it the resides in the boot sector (with a boot-sector virus) or by infecting the part of it that is loaded from other files (with a file-infector virus), or both. Thus, in order to maintain the integrity of a computer operating system and prevent viruses from infecting it, it is useful and necessary to prevent both boot-sector and file-infector viruses.

Work to develop virus protection for computers has often been aimed at PCs and workstations, which are extremely vulnerable to virus infection. The many commercial packages available to combat and/or recover from viral infection attest to the level of effort in this area.

Unfortunately, computer virus authors produce new versions and strains of virus code far more rapidly than programs can be developed to identify and combat them. Since viruses are typically recognized by a "signature", i.e., a unique sequence of instructions, new viral code may at times be difficult to identify. Existing signature-based virus detection and eradication programs require knowledge of the signature of a virus in order to detect that virus.

Current systems employ different strategies to defend against each type of virus. In one of these strategies to protect against boot infectors, first a clean (uninfected) copy of the boot-sector is made and kept on a backup device, e.g., a separate backup disk. Subsequent attempts to write to the boot-sector are detected by the anti-viral software in conjunction with the OS and the user is warned of potential problems of viral infection. Since reading from and writing to a disk is a function performed by the OS kernel, it knows when a disk is written to and which part of the disk is being written. Anti-virus software can be used to monitor every disk write to catch those that attempt to modify the boot sector. (Similarly, in systems which keep the OS in a particular named file, every attempt to modify that file can be caught). At this point, if the boot-sector has been corrupted the user can replace it with a clean copy from the backup disk.

To inhibit file infectors an integrity check, e.g., a checksum is calculated and maintained of all executables on the system, so that any subsequent modification may be detected. A checksum is typically an integral value associated with a file that is some function of the contents of the file. In the most common and simple case the checksum of a file is the sum of the integer values obtained by considering each byte of data

in the file as an integer value. Other more complicated schemes of determining a checksum are possible, e.g., the sum of the bytes in the file added to the size of the file in bytes. Whatever the scheme used, a change in the file will almost always cause a corresponding change in the checksum value for that file, thereby giving an indication that the file has been modified. If a file is found with a changed checksum, it is assumed to be infected. It can be removed from the computer system and a clean copy can restored from backup.

Many viruses use the low-level primitive functions of the OS, e.g., disk reads and writes, to access the hardware. As mentioned above, these viruses can often be caught by anti-viral software that monitors all use of the OS's primitives. To further complicate matters however, some viruses issue machine instructions directly to the hardware, thus avoiding the use of OS primitive functions. Viruses which issue instructions directly to the hardware can bypass software defenses because there is no way that their activities can be monitored. Further, new self-encrypting (stealth) viruses may be extremely difficult to detect, and thus may be overlooked by signature recognition programs.

One approach to the boot integrity problem is to place the entire operating system in read-only memory (ROM) 26 of the computer 10. However, this approach has disadvantages in that it prevents modifications to boot information, but at the cost of updatability. Any upgrades to the OS require physical access to the hardware and replacement of the ROM chips. It is also the case that as operating systems become more and more sophisticated, they become larger and larger. Their placement in ROM would require larger and larger ROMs. If user authentication is added to the boot program,

passwords may be difficult to change and operate on a per machine rather than a per user basis.

Some Operating Systems have so-called login programs which require users to enter a password in order to use the system. These login programs, whether stand-alone or integrated with an antiviral program, suffer from the same timing issues as previously mentioned. Also since most PCs provide a means of booting from alternate devices, e.g., a floppy disc drive, login programs can often be trivially defeated.

Summary of the Invention

In general, in one aspect, the invention features reducing the possibility of corruption of critical information required in the operation of a computer, by storing the critical information in a device; communicating authorization information between the device and the computer; and causing the device, in response to the authorization information, to enable the computer to read the critical information stored in the device.

Embodiments of the invention include the following features. The authorization information may be a password entered by a user and verified by the device (by comparison with a pre-stored password for the user); or biometric information (e.g. a fingerprint) about a user. The device may be a pocket-sized card containing the microprocessor and the memory (e.g., a smartcard). The critical information may include boot-sector information used in starting the computer; or executable code; or system data or user data; or file integrity information. The computer may boot itself from the critical information read from the device by executing modified boot code (stored as a BIOS extension) in place of normal boot code.

The device may pass to the computer secret information shared with the computer (e.g., a host access code); the computer validates the shared secret information. The authorization information may be file signatures for executable code; or a user's cryptographic key.

A communication link between the device and the computer carries the authorization information and the critical information.

In general, in another aspect, the invention features initializing a device for use in reducing the possibility of corruption of critical information required in the operation of a computer, by storing the critical information in memory on the device, storing authorization information in memory on the device, and configuring a microprocessor in the device to release the critical information to the computer only after completing an authorization routine based on the authorization information.

In general, in another aspect, the invention features a portable intelligent token for use in effecting a secure startup of a host computer. The token includes a housing, a memory within the housing containing information needed for startup of the host computer, and a communication channel for allowing the memory to be accessed externally of the housing.

In embodiments of the invention, the memory also contains a password for authorization, and a processor for comparing the stored password with externally supplied passwords. The memory may store information with respect to multiple host computers.

Among the advantages of the invention are the following.

The invention provides extremely powerful security at relatively low cost, measured both in terms of

purchase price and setup time. The additional hardware required is nominal, initial setup is one-time only, and upgrades require no hardware access--provided the user has the proper authentication. The invention obviates the need to defend against boot infectors and greatly reduces the risk to selected executables. The invention eliminates the PC's vulnerability to boot infectors, ensures the integrity of selected data, and guarantees the reliability of executables uploaded from the smartcard. Due to the authentication which occurs in the boot sequence, the possibility of sabotage or unauthorized use of the PC is restricted to those users who possess both a properly configured smartcard and the ability to activate it.

Other advantages and features will become apparent from the following description and from the claims.

Description

Fig. 1 is a diagram of a typical computer system using the invention;

Fig. 2 depicts the levels of an operating system;

Fig. 3 shows the layout of a computer disk;

Fig. 4 is a view of the memory of the computer system shown in Fig. 1;

Figs. 5-6 show, schematically, a smartcard and its memory;

Figs. 7-10 are flow diagrams of boot processes.

The invention makes use of so-called intelligent tokens to store a protected copy of the file that is usually stored in a disk boot sector, along with other file integrity data.

Intelligent tokens are a class of small (pocket-sized) computer devices which consist of an integrated circuit (IC) mounted on a transport medium such as plastic. They may also include downsized peripherals necessary for the token's application. Examples of such

peripherals are keypads, displays, and biometric devices (e.g., thumbprint scanners). The portability of these tokens lends itself to security-sensitive applications.

A subclass of intelligent tokens are IC cards, also known as smartcards. The physical characteristics of smartcards are specified by The International Standards Organization (ISO) (described in International Standard 7816-1, Identification Cards – Integrated Circuit(s) with Contacts – Physical Characteristics, International Standards Organization, 1987). In brief, the standard defines a smartcard as a credit card sized piece of flexible plastic with an IC embedded in the upper left hand side. Communication with the smartcard is accomplished through contacts which overlay the IC (described in International Standard 7816-2, Identification Cards – Integrated Circuit(s) With Contacts – Dimensions and Location of the Contacts, International Standards Organization, 1988). Further, ISO also defines multiple communications protocols for issuing commands to a smartcard (described in International Standard 7816-3, Identification Cards – Integrated Circuit(s) With Contacts – Electronic Signals and Transmission Protocols, International Standards Organization, 1989). While all references to smartcards here refer to ISO standard smartcards, the concepts and applications are valid for intelligent tokens in general.

The capability of a smartcard is defined by its IC. As the name implies, an integrated circuit consists of multiple components combined within a single chip. Some possible components are a microprocessor, non-static random access memory (RAM), read only memory (ROM), electrically programmable read only memory (EPROM), nonvolatile memory (memory which retains its state when current is removed) such as electrically erasable programmable read only memory (EEPROM), and special

purpose coprocessor(s). The chip designer selects the components as needed and designs the chip mask. The chip mask is burned onto the substrate material, filled with a conductive material, and sealed with contacts protruding.

Fig. 5 depicts a typical smartcard 22 with IC 32 which contains a CPU 34 and memory 36. Memory 36 is made up of a ROM 38 and an EEPROM 40.

The current substrate of choice is silicon. Unfortunately silicon, like glass, is not particularly flexible; thus to avoid breakage when the smartcard is bent, the IC is limited to only a few millimeters on a side. The size of the chip correspondingly limits the memory and processing resources which may be placed on it. For example, EEPROM occupies twice the space of ROM while RAM requires twice the space of EEPROM. Another factor is the mortality of the EEPROM used for data storage, which is generally rated for 10,000 write cycles and deemed unreliable after 100,000 write cycles.

Several chip vendors (currently including Intel, Motorola, SGS Thompson, and Hitachi) provide ICs for use in smartcards. In general, these vendors have adapted eight-bit micro-controllers, with clock rates of approximately 4 megahertz (Mhz) for use in smartcards. However, higher performance chips are under development. Hitachi's H8/310 is representative of the capabilities of today's smartcard chips. It provides 256 bytes of RAM, 10 kilobytes (K) of ROM, and 8K of EEPROM. The successor, the H8/510, not yet released, claims a 16-bit 10 Mhz processor, and twice the memory of the H8/310. It is assumed that other vendors have similar chips in various stages of development.

Due to these and other limits imposed by current technology, tokens are often built to application-specific standards. For example, while there is increased security in incorporating peripherals with the

token, the resulting expense and dimensions of self-contained tokens is often prohibitive. Because of the downsizing required for token- based peripherals, there are also usability issues involved. From a practical perspective, peripherals may be externally provided as long as there is reasonable assurance of the integrity of the hardware and software interface provided. The thickness and bend requirements for smartcards do not currently allow for the incorporation of such peripherals, nor is it currently feasible to provide a constant power supply. Thus, today's smartcards must depend upon externally provided peripherals to supply user input as well as time and date information, and a means to display output. Even if such devices existed for smartcards, it is likely that cost would prohibit their use. For most applications it is more cost effective to provide a single set of high cost input/output (I/O) devices for multiple cards (costing $15-$20 each) than to increase smartcard cost by orders of magnitude. This approach has the added benefit of encouraging the proliferation of cardholders.

Smartcards are more than adequate for a variety of applications in the field of computer security (and a number of applications outside the field). The National Institute of Standards and Technology (NIST) has developed the Advanced Secure Access Control System (ASACS) which provides both symmetric (secret key) and asymmetric (public key) cryptographic algorithms on a smartcard (described in An Overview Of The Advanced Smartcard Access Control System, J. Dray and D. Balenson, Computer Security Division/ Computer Systems Laboratory, National Institute of Standards and Technology, Gaithersburg, Maryland). The ASACS utilizes DES (Data Encryption Standard) (described in Data Encryption Standard – FIPS Publication 46-1, National Institute of

Standards and Technology (formerly NBS), Gaithersburg, Maryland) for login authentication using the 9.26 standard authentication protocol (defined in Financial Institution Sign-on Authentication For Wholesale Financial Systems [DES-based user authentication protocols], ANSI X9.26, X9 Secretariat, American Bankers Association, Washington, D.C.). It further offers a choice of RSA (described in R. L. Rivest, A. Shamir, L. M. Adleman, "A Method for Obtaining Digital Signatures and Public Key Cryptosystems," Communications of the ACM, pp. 120-126, Volume 21, Number 2, February 1978) or DSA (described in "The Digital Signature Standard Proposed by NIST", Communications of the ACM, Volume 35, No. 7, July, 1992, pp. 36-40) for digital signatures.

The ASACS card provides strong security because all secret information is utilized solely within the confines of the card. It is never necessary for a secret or private key to be transferred from the card to a host computer; all cryptographic operations are performed in their entirety on the card. Although the current H8/310 equipped card requires up to 20 seconds to perform sign and verify operations, a new card developed for the National Security Agency (NSA) is capable of performing the same operations in less than a second. The NSA card is equipped with an Intel 8031 processor, a Cylink CY513 modular exponentiator (coprocessor), 512 bytes of RAM and 16 Kbytes of EEPROM. Since both the RSA and DSA algorithms are based on modular exponentiation, it is the Cylink coprocessor which accounts for the NSA card's greatly enhanced performance.

Trusted Information Systems (TIS), a private computer security company, is currently integrating smartcards for use with privacy enhanced computer mail in a product called TISPEM. A user-supplied smartcard is used to store the user's private key and in addition

provides service calls for digital signatures and encryption so that all operations involving the private key are performed on the card. In this way the private key need never leave the card. Thus, a TISPEM user can sit down at any terminal which has access to the application software (and a smartcard reader) and read encrypted mail and send signed messages without fear of compromising his or her private key.

Referring to Figs. 5 and 6, in the invention, a smartcard's memory 36 contains an propriety operating system and software programs to enforce access control (in ROM 38) together with critical information 42, 44, 46 usually stored in the host's boot-sector, directory, and executables (in EEPROM 40). The amount of memory available on the token will dictate the amount of data which may be stored. In addition, other sensitive or private information 48 may be stored to ensure its integrity.

One aspect of I.B.M. personal computers and their clones is that the computer systems are not all identically configured. Some computer systems may have devices, e.g., display monitors or optical disks, that other systems do not have. Some of these computer systems have slots which can accept addin boards which can be used to enhance the system by, for example increasing its speed or the resolution of its display. In order to overcome the complications introduced by non-uniformity of computer platforms, a set of functions that provide an interface to the low-level input/output (I/O) system is provided. In the I.B.M. PC systems this system is called the Basic Input Output System (BIOS) and resides in the EPROM and is loaded by the boot program before it loads the program from the boot sector.

I.B.M. PCs are expandable and can have new devices attached to them using cards inserted into slots in the

computer's chassis. A new device or card may need to extend the interface to the low-level I/O system, i.e., to extend the BIOS. To do this it uses a <u>BIOS Extension</u>.

The system takes advantage of the following feature of the PC's boot sequence: after loading the BIOS but before loading the boot sector, the boot program examines each expansion slot in the computer, looking for a BIOS extension. If it finds one it hands over control to that extension. In a typical PC system the BIOS extension would load its functions into the system and then pass control back to the boot program. After checking all extension slots for BIOS extensions the boot program then begins looking in the disk drives for a disk with a boot sector from which to boot.

Fig. 7 describes the boot sequence of a PC. When the boot sequence is started 50 (either by cycling the power of the computer or by pressing a particular sequence of keys on the keyboard) the boot program in ROM 28 of the computer system loads the BIOS code 52 into memory 14. This BIOS code allows the program to interact with attached devices. The boot program then examines each slot 54 (by address) in turn to determine if it contains a board with a BIOS extension 56. If the boot program finds a slot with a BIOS extension then it loads and executes the code associated with that BIOS extension 58. After the BIOS extension's code is executed, control is passed back to the boot program to examine the next slot address 54. When all slots have been examined the boot program then tries to find a <u>boot disk</u>, i.e., a disk with a boot sector 60. (I.B.M. PCs are configured to look for a boot disk starting in the floppy drives and then on the hard drives.) Once a boot disk is found, its boot sector is loaded and executed 62.

A Smartcard-Based Operating System

A prototype of the invention, also referred to herein as The Boot Integrity Token System (BITS), has been developed to provide computer boot integrity and enforce access control for an IBM or compatible system (PC-BITS), although the technology described is applicable to a wide variety of other computer systems.

Referring again to Fig. 1, the basic idea behind BITS is that the host computer system 10 will actually boot itself from a smartcard 22. Since the smartcard 22 can be readily configured to require user authentication prior to data access, it provides an ideal mechanism to secure a host computer. Thus, if critical information required to complete the boot sequence is retrieved from a smartcard, boot integrity may be reasonably assured. The security of the system assumes the physical security of the host either with a tamper-proof or tamper-evident casing, and the security of the smartcard by its design and configuration. If an attacker can gain physical access to the hardware, it is impossible to guarantee system integrity.

Referring to Figs. 1 and 4-6, the PC-BITS prototype consists of an 8-bit addin board 30, a smartcard drive 20 (reader/writer) which mounts in a floppy bay of computer system 10, configuration as well as file signature validation software, and a supply of smartcards. The board 30 contains a special boot PROM which is loaded with a program which interfaces to the smartcard reader. Further, the board is configurable to set an identifier for the host.

Installation and configuration of the host can be accomplished in minutes. The process involves insertion of the addin board and the equivalent of the installation of a floppy drive. Once installed, the computer will not complete the boot sequence without a valid user

authentication to a properly configured smartcard. The reason for this is that the addin board 30 is a BIOS Extension board. Recall from the discussion above, with reference to Fig. 7, that the boot program loads and executes any and all BIOS extensions 58 before it looks for a boot disk 60. The addin board 30 takes control from the boot program when its BIOS extension is loaded, but it does not return control back to the boot program. Thus, the modified boot process is like that depicted in Fig. 8, where the process of looking for and loading a boot sector does not take place under control of the boot program, but under the control of the modified boot program on the BIOS Extension card.

During system startup, two authentications must be successfully performed to complete the boot sequence. First, the user enters a password which is checked by the smartcard to confirm that the user is authorized to use that card. If successful, the smartcard allows the PC to read the boot-sector and other information from the smart-card memory. To authenticate the smartcard to the host, the card must also make available a secret shared with the host, in this case the configurable host identifier. Table 1 illustrates these transactions. If both the user and card authentication are successful, the boot sequence completes, and control is given to the PC operating system — some or all of which has been retrieved from the smartcard. The user may then proceed to utilize the PC in the usual fashion, uploading additional information (i.e., applications or application integrity information) from the smartcard as needed.

Step	Action	Implementation
0	Insert card and power up the host	Apply power and reset card
1	Authenticate user and present data to the smartcard	Present user password to the smartcard
2	Authenticate the card to the host	Host reads shared secret from the smartcard
3	Upload boot information	Host reads boot-sector from the smartcard
4	Integrity check host-resident boot files and complete boot sequence if successful	Host computes file-checksum which the smartcard encrypts to form a signature; this value is compared with the signature stored on the card

Table 1: PC-BITS System Startup

The card is expected to contain critical data such as digital file signatures for system executables and the user's cryptographic keys. Comparing executable file signatures with those stored on the smartcard provides a virus detection mechanism which is difficult to defeat. This approach is consistent with a recent trend to validate file integrity rather than solely scan for known virus signatures.

Refer now to Figs. 9-10, which show the control flow of the modified boot sequence from the point of view of the computer system and the smartcard respectively. The flow diagram in Fig. 9 shows the control flow of the modified boot program loaded from the BIOS Extension addin card in step 58 (Fig. 8) of the original boot sequence. Fig. 10 shows the processing that occurs (during the boot sequence) on the CPU 34 of the smartcard 22 while it is in the smartcard reader 20.

The modified boot program (the BIOS extension) prompts the user for a password 60 on display 18. The

password is read 62 from keyboard 16 and sent to the smartcard 22. At the same time, the smartcard is waiting for a password 92. When the smartcard 22 gets a password 94 from the computer system 10 it validates the password 96 using whatever builtin validation scheme comes with the smartcard. If the password is invalid then the smartcard 22 returns a "NACK" signal 100 to the computer system 10, disallows reading of its data 102 and continues to wait for another password 92. (In some systems a count is kept of the number of times an invalid password is entered, with only a limited number of failed attempts allowed before the system shuts down and requires operator or administrator intervention.) If the password is valid then the smartcard 22 returns an "ACK" signal 98 to the computer system 10 and allows reading of the data in its memory and files 104.

The computer system 10 waits for the response 66 from the smartcard 22 and then bases its processing on the returned result 68. If the password was invalid (i.e., the smartcard returned an "NACK" signal) then the user is once again prompted for a password 60 (recall again the discussion above about limiting the number of attempts.) If the password is valid the user has been authenticated to the smartcard and now the computer system attempts to authenticate the card for the system. It does this (in step 70) by reading a host access code 46 from EEPROM 40 of the smartcard 22. (The host access code is one of the items of data put on the smartcard by the system administrator during system configuration.) The host access code 46 from the smartcard is compared to the one that the system has stored about itself 72. If they are unequal then this smartcard 22 is not allowed for this host computer system 10 and the boot process is terminated 74. (Note that this termination ends the entire boot process — the boot program does not then try

to boot from a disk). If the check at step 72 finds the codes to be equal then the card is authenticated to the host and the boot sector 42 from EEPROM 40 of smartcard 22 is read (step 76) into memory 14 of computer system 10.

Recall that, because of the limited size of the memory on smartcards today, it is not yet possible to store all the information and files for an OS the size of, e.g., MS-DOS on a smartcard. Therefore the other files will have to be read from a disk or other storage device. It is, however, still possible to ensure their integrity by the use of integrity information, e.g., checksums for the files, stored on the smartcard (by a system administrator).

In step 78 the BIOS Extension program reads the file integrity information 44 from the EEPROM 40 of the smartcard 22. Then, for each file whose integrity is required, e.g., IO.SYS, etc, the integrity information for that file is validated (step 80). If the OS files are found to be invalid 82 then and error is reported 84 to the user on display 18. If the error is considered to be severe 88 then the boot process terminates 90. (The determination of what constitutes "severe" is made in advance by the system administrator based on the security requirements of the system. In some systems no file changes are allowed, in others some specific files may be modified, but not others.)

If the file integrity information is valid (or the error is not considered severe) then the boot sector that was loaded from the smartcard (in step 76) is executed 86. At this point the boot process will continue as if the boot sector had been loaded from a disk (as in the unsafe system).

In the BITS system, cards are configured and issued by a security officer using the software provided

– the current prototype is written in C to improve portability.

Configuration entails the loading onto the smartcard of the boot sector 42 as well as digital signatures for boot files stored on the host 44. At the time of issue, it is necessary to specify the machine or set of machines 46 that the user to whom the card is being issued will be granted access so that a host key may be loaded. File integrity information and portions of the host operating system are also loaded onto the smartcard at this time 44. All data is read protected by the user's authentication (e.g., cannot be read unless the user password is presented correctly), and write protected by the security officer authentication. This arrangement (depicted in Table 2) prevents users from inadvertently or deliberately corrupting critical data on the smartcard.

Smartcards may be issued on a per host, per group, or per site basis depending on the level of security desired. Since the secret shared by the host and card is configurable on the host, it is possible to issue smartcards in a one-to-one, many-to-one, or many-to-many fashion. A one-to-one mapping of users to hosts corresponds to securing a machine for a single user. Analogously, many-to-one allows the sharing of a single machine, and many-to-many allows for the sharing of multiple machines among an explicit set of users. One-to-many is a possible, but usually wasteful, mapping of computer resources.

Step	Action	Implementation
0	Security officer creates user and security officer accounts on card	Present manufacturer password and load user-specified secret codes for accounts.
1	Load boot-sector onto card	Create a file readable under the user password and writable under the security officer password and write the partition boot record.
2	Compute and load signatures for selected files	For each file compute a hash which is encrypted by the card. This signature together with the file name is stored on the card.
3	Load host authentication information	Create a file readable under the user password and writable under the security officer password and write a secret to be shared with the host.

Table 2: BITS Smartcard Configuration

The effectiveness of BITS is limited by the feasibility of storing all boot-relevant information on a smartcard. To the extent this is possible, boot integrity will be maintained. BITS is not a virus checker, however, for those files whose signatures are stored on the smartcard, it is possible to detect the modification of the file on the host system. Thus the user may be notified that an executable is suspect before it is run. In general BITS will provide enhanced computer security by utilizing the secure storage and processing capabilities inherent to the smartcard.

From a security perspective, the less that a user depends upon from a shared environment, the better. Any shared writable executable may potentially contain malicious code. Fortunately, advances in technology are likely to permit the storage of entire operating systems

as well as utilities on a smartcard, thus obviating the necessity of sharing executables altogether.

Smartcards themselves may also be made more secure. Currently, authentication to the smartcard is limited to user-supplied passwords. In most systems, three consecutive false presentations results in the smartcard account being disabled. However, if biometric authentication (e.g., fingerprint checks or retinal scans) is incorporated into the card, it will be possible to achieve higher assurance in user authentication.

To date, the size requirements of smartcards have imposed the greatest limitation upon their utility; the current state of the art is a 1.0 micron resolution in the burning of chip masks. However, SGS Thompson and Phillips recently announced the development of 0.7 micron technology as well as plans for a 0.5 micron technology. Regardless of these advances, the chips themselves are still currently limited to a few millimeters on a side due to the brittle nature of the silicon substrate from which they are made. A flexible substrate might allow chips which occupy the entire surface of the smartcard resulting in an exponential gain in computing resources.

A smartcard with this capability would result in a truly portable (wallet-sized) personal computer which could be made widely available at relatively low cost. In this type of computing environment only the bulky human interface need be shared. A computing station might consist of a monitor, a keyboard, a printer, and a smartcard interface. The user could walk up to the computing station, supply the CPU and data storage, and begin work.

The implications of this technology are impressive. The existence of instant PC access for millions regardless of location would greatly enhance the utility of computers. The ability to use the same

environment wherever one chooses to work would eliminate time spent customizing and increase productivity. The security provided by smartcards may also result in increased security for sensitive data by decreasing the likelihood of compromise or loss.

Because of the mode in which the invention is used, it might be wrongly compared with a boot from floppy disk. While it is true that inserting a smartcard is similar to inserting a floppy, the interaction during the boot sequence is entirely different. The smartcard-based system incorporates two separate authentications, user to card and card to host, which are entirely absent from the floppy boot. Further, the integrity of the boot information on a floppy is protected only by an easily removed write-protect-tab; while the smartcard requires the authentication of the security officer in order to update boot information. One may also note the ease of carrying a smartcard as compared with a floppy disk.

The invention has been installed and tested on a desktop computer. However, the system is easily generalizable to any computing environment including mainframe, microcomputer, workstation, or laptop. The intelligent token of choice for this embodiment is a smartcard. The reason is that ISO Standard smartcards are expected to be the most ubiquitous and consequently the least expensive form of intelligent token.

Appendix A, incorporated by reference, is a source code listing of the BIOS Extension code loaded onto the memory of the addin board (as described above) written in 8088 Assembly language. This code may be assembled using a Borland Turbo Assembler (TASM™) and linked using a Borland Turbo Linker (TLINK™), and run on a AT Bus (ISA compatible) computer running a DOS compatible OS. Appendix A contains material which is subject to copyright protection. The owner has no objection to

Appendix A


```
;dosbits.asm    Paul C. Clark
;             BOOT INTEGRITY TOKEN SYSTEM - DOS Version
;                 BIOS Extension for DOS smartcard boot
;                 Version 1
;
;       Useful Defines
ACK             EQU     60h
ETX             EQU     03h
NAK             EQU     000E0h
COM1_CTL_REG    EQU     003FCh
COM1_DATA_REG   EQU     003F8h
COM1_STAT_REG   EQU     003FDh
STACKAREA     EQU   06000h
SCRATCHAREA   EQU   07000h
PBRAddress    EQU   07C00h
PWDAddress    EQU   0C007h

;---------------------------------------------------------
Cseg            Segment Para Public 'Code'
                Assume CS:Cseg
                Org 03h                         ;Code starts
after extension
                                        ;signature and length
                Mov     BX,SP                   ;Save stack
                Mov     CX,SS
                Push    BX
                Push    CX
                Mov     AX,STACKAREA            ;Set up new stack
                Mov     SS,AX
                Mov     SP,0000h
                Mov     AX,SCRATCHAREA        ;Set scratch area
                Mov     ES,AX
                Push    CS                    ;Data seg = Code
 seg for small model
                Pop     DS
                Sti                           ;Allow breaks
                Cld                           ;Set direction to
 increment
                Call    Main

                Pop     CX                    ;Restore original
 stack
                Pop     BX
                Mov     SS,CX
```

```
                 Mov     SP,BX

                 Jmp     Int19Hdl              ;Execute the PBR

Abort            Label   Near
                 DB      0CBh                  ;Far return
opcode
;                 Mov     AH,4Ch                ; Return
control to DOS
;                 INT     21h

;-----------------------------------------------------
;Identify BIOS extension
;-----------------------------------------------------
                 DB       'ROM BIOS Extension for DOS BITS '
                 DB       'Version 1 '

;-----------------------------------------------------
;Main Program
;-----------------------------------------------------
Main              Proc    Near

                  Call    InitPort             ;Initialize COM
port
                  Call    ClrScr               ;Clear screen
                  Call    DrawBox              ;Draw the frame
for dialog
                  Mov     DX,071Ah
                  Mov     SI,offset STitle     ;Display title
                  Call    StrScr
                  Mov     DX,081Eh
                  Mov     SI,offset SSTitle    ;Display
subtitle
                  Call    StrScr
                  Mov     DX,0A1Dh
                  Mov     SI,offset InsrtCrd   ;Prompt user for
card
                  Call    StrScr
                  Call    WaitCard             ;Wait until card
is inserted
                  Call    GetPwd               ;Get and present
password

                  Mov     AX,SCRATCHAREA
                  Mov     ES,AX
                  Call    ReadPbr              ;Read and
install PBR from card

                  Mov     DX,0C1Ah
```

```
                Mov     SI,offset Erase       ;Erase load
message
                Call    StrScr
                Mov     DX,0C1Ah              ;Notify user of
file checking
                Mov     SI,offset FileChk
                Call    StrScr

                Call    ChkIO                 ;Check IO.SYS
integrity
                Call    ChkMSDOS              ;Check MSDOS.SYS
integrity
                Call    ChkCMD                ;Check
COMMAND.COM integrity
                Call    ChkCFGSYS             ;Check
CONFIG.SYS integrity

                Mov     DX,0C1Ah
                Mov     SI,offset Erase       ;Erase file
check message
                Call    StrScr
                Call    ClrScr

                Mov     SI,offset PowerOff    ;Remove power
from card
                Call    CReaderCom

;PC hangs part way through boot process using this
technique! Needs fix!
;                 Xor      AX,AX                  ;Replace INT
19 handler with
;                 Mov      DS,AX                  ;address of
PBR
;                 Lea      AX,PBRAddress          ;Jump to
where the PBR is
;                 Mov      DS:[0064],AX
;                 Push     CS
;                 Pop      AX
;                 Mov      DS:[0066],AX
;                  Int      19

            Ret
Main        Endp

;-----------------------------------------------------
;Interrupt 19 (Warm Boot) Handler
;       - execute PBR loaded from card.
;-----------------------------------------------------
Int19Hdl        Proc    Far
                Sti
```

```
                DB      0EAh,00h,7Ch,00h,00h    ;Far JMP to
0000:7C00
Int19Hdl        EndP

;----------------------------------------------------------
;Initialize COM1: 9600,N,8,1
;----------------------------------------------------------
InitPort        Proc    Near
                Push    AX
                Push    DX

                Mov     AH,00               ;Interrupt 14
service 0
                Mov     AL,11100011b        ;9600 baud, no
parity, 8 bit data
                Mov     DX,0000             ;COM1:
                Int     14h

                Pop     DX
                Pop     AX
                Ret
InitPort        Endp

;----------------------------------------------------------
;Wait for card to be inserted
;----------------------------------------------------------
WaitCard        Proc    Near
                Cli

WaitLoop        Label   Near
                Push    DS

                Mov     SI,offset InitRdr       ;Initizlize
reader
                Call    CReaderCom
                Mov     SI,offset StCrdTp       ;Set card type
                Call    CReaderCom
                Mov     SI,offset InitRdr       ;Reset card
                Call    CReaderCom
                Mov     SI,offset PowerOn       ;Apply power
to card
                Call    CReaderCom
                Mov     SI,0001h
                Mov     BX,SCRATCHAREA
                Mov     DS,BX
                Lodsb
                Cmp     AL,04h                  ;If return
code is 4 bytes,
                Pop     DS                      ;Card isn't
there!
```

```
                 Jz      WaitLoop                ;Otherwise
something is there...

                 Sti
                 Ret
WaitCard         Endp

;--------------------------------------------------
;Get password from user and present to card
;--------------------------------------------------
GetPwd           Proc    Near
                 Push    AX
                 Push    CX
                 Push    DS
                 Push    DI
PwdLoop          Label   Near
                 Mov     CX,00h                  ;Initialize
character count
                 Mov     DX,0A1Ah                ;Erase previous
message
                 Mov     SI,offset Erase
                 Call    StrScr
                 Mov     DX,0A1Ah
                 Mov     SI,offset PwdPrmpt      ;Display
password prompt
                 Call    StrScr
                 Mov     DI,PWDAddress

ReadLoop         Label   Near

                 Mov     SI,offset KbdStat       ;Display
keyboard status label
                 Mov     DX,0101h
                 Call    StrScr
                 Mov     AH,01h                  ;Check
keyboard status
                 Int     16h
                 Call    DispStat                ;Display
Keyboard Status
                 Jz      ReadLoop                ;Loop on
empty buffer

                 Mov     DX,CX              ;Put the cursor in
the right place
                 Add     DX,0A24h
                 Call    CurPos

                 Mov     AH,0h
                 Int     16h                     ;Read character
from keyboard
```

```
                Cmp     AL,08h          ;Check for
<BACKSPACE>
                Je      EraseChar
                Cmp     AL,0Dh          ;Check for
<RETURN>
                Je      SpaceFill
                Cmp     AL,1bh          ;check for <ESC>
                Je      SpaceFill
                Cmp     CX,08h          ;Length cannot
exceed eight
                Jge     Beep

                Stosb                   ;Store as part of
presentation str
                Inc     CX              ;Increment
character count
                Mov     AL,'X'
                Call    DisplayChar
                Jmp     ReadLoop

EraseChar       Label   Near            ;Process a
BACKSPACE
                Cmp     CX,00h          ;Is backspace all
there is?
                Je      Beep            ;if no chars to
delete goto read loop
                Dec     DI              ;Remove character
before backspace
                Dec     CX              ;Decrement char
count
                Call    DisplayChar
                Mov     AL,' '
                Call    DisplayChar
                Mov     AL,08h
                Call    DisplayChar
                Jmp     ReadLoop

Beep            Label   Near            ;Ring the bell and
continue
                Mov     AL,07h
                Call    DisplayChar
                Jmp     ReadLoop

SpaceFill  Label   Near                 ;User has pressed
RETURN or ESC
           Mov     AL,' '               ;Pad out pwd with
spaces
padloop    label   near
           Cmp     CX,08h
           Jge     Presentpw            ;After space
padding, send pw
```

```
                 Stosb
                 Inc      CX
                 Jmp      padloop

    Presentpw    Label    Near
    ;Jmp CodeOK
                 Mov      AX,0C000h           ;Fill-in rest of
    present code cmd
                 Mov      DI,AX
                 Mov      AL,0Eh
                 Stosb
                 Mov      AX,000DAh
                 Stosw
                 Mov      AX,0020h
                 Stosw
                 Mov      AX,0804h
                 StoSw

                 Mov      SI,0C000h           ;Present the code to
    the reader
                 Mov      AX,SCRATCHAREA
                 Mov      DS,AX
                 Call     CReaderCom

                 Mov      SI,0003             ;Look at the card
    response string
                 Lodsb
                 Cmp      AL,90h              ;90h = code ok
                 Je       CodeOK
                 Lodsb
                 Cmp      AL,40h              ;9840h = card locked
    (!)
                 Je       CardLock

                 Mov      DX,0C1Ah
                 Mov      SI,offset BadPass
                 Call     StrScr
                 Jmp      PwdLoop             ;Give it another try

    CardLock     Label    Near                ;Card is locked...
                 Mov      DX,0A1Ah
                 Mov      SI,offset Erase
                 Call     StrScr
                 Mov      DX,0C1Ah
                 Mov      SI,offset Erase
                 Call     StrScr
                 Mov      DX,0B20h
                 Mov      SI,offset CdLck     ;Inform user
                 Call     StrScr
                 Mov      DX,0C1Ah
                 Mov      SI,offset CdLck2
```

```
                Call    StrScr
                Mov     SI,offset PowerOff
                Call    CReaderCom
LockLoop        Label   Near
                Jmp     LockLoop            ;Hang in infinite
loop

CodeOK          Label   Near                ;Presentation was
OK...
                Mov     DX,0C1Ah
                Mov     SI,offset Erase
                Call    StrScr
                Mov     DX,0C1Ah
                Mov     SI,offset Corrct    ;Inform user
                Call    StrScr

                Pop     DI
                Pop     DS
                Pop     CX                  ;Cleanup and return
                Pop     AX
                Ret
GetPwd          Endp


;-----------------------------------------------
;Load partition boot record from card
;-----------------------------------------------
ReadPBR         Proc    Near
                Push    DS

                Mov     SI,offset SelPbrFl        ;Select the
PBR file
                Call    CReaderCom

                Mov     AX,0C000h                 ;Form command
at 7000:C000
                Mov     DI,AX
                Mov     AX,0DB06h                 ;Store command
bytes
                Stosw
                Mov     AX,0B200h
                Stosw
                Xor     AX,AX
                Stosw
                Mov     AL,34h
                Stosb

                Xor     DX,DX                     ;Init no.
bytes read
                Mov     BH,01h
RFLoop          Label   Near
```

```
                Mov     AX,0C004h
                Mov     DI,AX
                Mov     AX,DX
                Mov     CL,04h
                Div     CL
                Stosb
                Cmp     BH,0Ah
                Jne     SendRdCmd
                Inc     DI
                Mov     AL,2Ch
                Stosb
SendRdCmd       Label   Near
                Mov     SI,0C000h
                Mov     AX,SCRATCHAREA
                Mov     DS,AX
                Call    CReaderCom
                Push    ES
                Xor     AX,AX
                Mov     ES,AX                       ;Destination
segment 0000
                Mov     SI,0003                     ;Skip header
bytes
                Mov     AX,PBRAddress
                Add     AX,DX
                Mov     DI,AX
                Add     DX,0034h
                Mov     CX,001Ah
                Cmp     BH,0Ah
                Jne     DoCopy
                Mov     CX,0016h
DoCopy          Label   Near
                Repz
                Movsw                               ;Copy word at
a time
                Pop     ES
                Inc     BH
                Cmp     BH,0Bh
                Jne     RFLoop

                Pop     DS
                Ret
ReadPBR         Endp

;---------------------------------------------------
;Check integrity of IO.SYS
;---------------------------------------------------
ChkIO           Proc    Near

                Mov     DX,0C2Ah                ;Display filename
                Call    CurPos
                Mov     SI,offset File1
```

```
                Call     StrScr
                Push     BX
                Mov      BX,0004h               ;Simple delay for
simulation
                Call     Delay
                Pop      BX
                Ret
ChkIO           Endp

;---------------------------------------------------------
;Check integrity of MSDOS.SYS
;---------------------------------------------------------
ChkMSDOS        Proc     Near

                Mov      DX,0C2Ah               ;Erase previous
filename
                Mov      SI,offset SErase
                Call     StrScr
                Mov      DX,0C2Ah               ;Display filename
                Mov      SI,offset File2
                Call     StrScr
                Push     BX
                Mov      BX,0004h               ;Simple delay for
simulation
                Call     Delay
                Pop      BX

                Ret
ChkMSDOS        Endp

;---------------------------------------------------------
;Check integrity of COMMAND.COM
;---------------------------------------------------------
ChkCMD          Proc     Near

                Mov      DX,0C2Ah               ;Erase previous
filename
                Mov      SI,offset SErase
                Call     StrScr
                Mov      DX,0C2Ah               ;Display filename
                Mov      SI,offset File3
                Call     StrScr
                Push     BX
                Mov      BX,0004h               ;Simple delay for
simulation
                Call     Delay
                Pop      BX

                Ret
ChkCMD          Endp
```

```
;-------------------------------------------------------
;Check integrity of CONFIG.SYS
;-------------------------------------------------------
ChkCFGSYS   Proc    Near

            Mov     DX,0C2Ah            ;Erase previous filename
            Mov     SI,offset SErase
            Call    StrScr
            Mov     DX,0C2Ah            ;Display filename
            Mov     SI,offset File4
            Call    StrScr
            Push    BX
            Mov     BX,0004h            ;Simple delay for simulation
            Call    Delay
            Pop     BX

            Ret
ChkCFGSYS   Endp

;-------------------------------------------------------
;Busy wait:
;       - duration passed in BX
;-------------------------------------------------------
Delay   Proc Near
        Push BX
        Push CX
DLoop0  Label       Near
        Mov  CX,0000
DLoop1  Label       Near
        Inc  CX
        Cmp  CX,0FFFFh
        Jne  DLoop1
        Dec  BX
        Jnz  DLoop0
        Pop  CX
        Pop  BX
        Ret
Delay   Endp

;-------------------------------------------------------
;Transmit byte to COM1:
;       - byte passed on stack
;-------------------------------------------------------
SendByte    Proc    Near
            Push    BP
            Mov     BP,SP
            Push    AX
            Push    DX
```

```
               Mov     DX,0000
SendDly        Label   Near                 ;Delay to prevent
overrun
               Inc     DX
               Cmp     DX,00FFh
               Jnz     SendDly

               Mov     DX,COM1_CTL_REG      ;Indicate send

               Mov     AL,0Bh
               Out     DX,AL

               Mov     DX,COM1_DATA_REG     ;Output byte to port
               Mov     AL,byte ptr [BP+4]
               Out     DX,AL

               Pop     DX
               Pop     AX
               Pop     BP
               Ret
SendByte       Endp

;---------------------------------------------------
;Transmit ASCII representation of byte to COM1:
;        - byte passed on stack
;---------------------------------------------------
ASendByte      Proc    Near
               Push    BP
               Mov     BP,SP
               Push    AX
               Push    DX
               Push    CX

               Mov     AL,byte ptr [BP+4]   ;Get byte
               Mov     AH,00
               Mov     CL,04h
               Shr     AX,CL                ;Arith shift right

               Cmp     AX,0Ah               ;Result > 10
(A..F) ?
               Jge     HAlpha               ;Yes, calc ASCII
for letter
               Add     AL,30h               ;No, calc ASCII
for number
               Jmp     HSend
HAlpha         Label   Near
               Add     AL,37h               ;Calc ASCII for
letter
Hsend          Label   Near
               Push    AX
```

```
                Call    SendByte            ;Send out
calculated byte
                Add     SP,02h

                Mov     AL,byte ptr [BP+4]
                And     AX,000Fh            ;Mask out high
nibble
                Cmp     AX,0Ah              ;Result > 10
(A..F) ?
                Jge     LAlpha              ;Yes, calc ASCII
for letter
                Add     AL,30h              ;No, calc ASCII
for number
                Jmp     LSend
LAlpha          Label   Near
                Add     AL,37h              ;Calc ASCII for
letter
Lsend           Label   Near
                Push    AX
                Call    SendByte            ;Send out
calculated byte
                Add     SP,02h

                Pop     CX
                Pop     DX
                Pop     AX
                Pop     BP
                Ret
ASendByte       Endp

;-----------------------------------------------------
;Get byte from COM1:
;         -byte returned in AL
;-----------------------------------------------------
RcvByte         Proc    Near
                Push    DX

                Mov     DX,COM1_STAT_REG  ;Wait for receive
ready
GetByte         Label   Near
                In      AL,DX
                And     AL,01h
                Jz      GetByte

                Mov     DX,COM1_DATA_REG  ;Get byte
                In      AL,DX

                Pop     DX
                Ret
RcvByte         Endp
```

```
;-----------------------------------------------------
;Get byte from COM1: converting from ASCII representation
to byte
;          -byte returned in AL
;          -ETX returns 01 in AH, 00 otherwise
;-----------------------------------------------------
ARcvByte    Proc     Near
            Push     BX
            Push     CX

            Call     RcvByte              ;Get a byte from
port
            Cmp      AL,ETX               ;Is it ETX?
            Je       RcvEtx

            Cmp      AL,41h               ;Not ETX, convert to
high nibble
            Jge      HNumCvt
            Sub      AL,30h
            Jmp      RcvLow
HNumCvt     Label    Near
            Sub      AL,37h

RcvLow      Label    Near
            Mov      BL,AL                ;Store high nibble
in BL
            Call     RcvByte              ;Get another byte
from port
            Cmp      AL,41h               ;Convert to low
nibble
            Jge      LNumCvt
            Sub      AL,30h
            Jmp      Combine
LNumCvt     Label    Near
            Sub      AL,37h

Combine     Label    Near
            Mov      CL,04
            Shl      BL,CL
            Or       AL,BL                ;Combine h/l nibbles
into byte
            Mov      AH,00
            Jmp      RcvDone

RcvEtx      Label    Near
            Mov      AH,01                ;ETX, set AH = 1

RcvDone     Label    Near
            Pop      CX
            Pop      BX
            Ret
```

```
ARcvByte   Endp

;-----------------------------------------------
;Send NAK to reader/writer (request retransmission)
;-----------------------------------------------
SendNAK     Proc     Near
            Push     AX

            Mov      AL,NAK                  ;Transmit NAK
            Push     AX
            Call     ASendByte
            Add      SP,02h

            Mov      AL,00                   ;Command length is 0
            Push     AX
            Call     ASendByte
            Add      SP,02h

            Mov      AL,NAK                  ;CRC is just NAK
byte
            Push     AX
            Call     ASendByte
            Add      SP,02h

            Mov      AX,ETX                  ;Transmit ETX
            Push     AX
            Call     SendByte
            Add      SP,02h

            Pop      AX
            Ret
SendNAK     Endp

;-----------------------------------------------
;Send command to reader/writer
;         -check response for NAK and retransmit if
necessary
;         -pointer to string passed in DS:SI
;-----------------------------------------------
CReaderCom Proc     Near
           Push     AX
           Push     BX
           Push     CX
           Push     DX

CommandLoop Label   Near
            Push    DS
            Push    SI
            Call    ReaderCom                ;Send reader/writer
command
```

```
            Call     CGetResp          ;Get reader/writer
response
            Push     ES
            Pop      DS
            Mov      SI,0000
            Lodsb                      ;Look at first byte
of response
            Cmp      AL,NAK            ;NAK? message not
received properly
            Jne      RecvOK            ;Not NAK, message
recieved OK
            Pop      SI
            Pop      DS
            Jmp      CommandLoop       ;Try again

RecvOK      Label    Near
            Pop      SI
            Pop      DS
            Pop      DX
            Pop      CX
            Pop      BX
            Pop      AX
            Ret
CReaderCom  Endp

;---------------------------------------------------
;Send command to reader/writer
;         -pointer to string passed in DS:SI
;---------------------------------------------------
ReaderCom   Proc     Near
            Mov      AL,ACK            ;Transmit ACK
            Mov      BL,AL             ;Store for CRC
            Push     AX
            Call     ASendByte
            Add      SP,02h

            Lodsb                      ;Load command length
            Xor      BL,AL             ;Compute CRC
            Push     AX
            Call     AsendByte         ;Transmit command
length
            Add      SP,02h

            Mov      CL,AL             ;Loop on command
length
            Mov      DL,00
ComLoop     Label    Near
            Lodsb                      ;Get next command
byte
            Xor      BL,AL             ;Compute CRC
```

```
                Push    AX
                Call    ASendByte           ;Transmit command
byte
                Add     SP,02h
                Inc     DL
                Cmp     DL,CL
                Jnz     ComLoop

                Push    BX                  ;Transmit computed
CRC
                Call    ASendByte
                Add     SP,02h

                Mov     AL,ETX              ;Transmit ETX
                Push    AX
                Call    SendByte
                Add     SP,02h

                Ret
ReaderCom       Endp

;-----------------------------------------------------------
;Get response from reader/writer
;        - checks response CRC and requests
retransmission if necessary
;-----------------------------------------------------------
CGetResp        Proc    Near

RespLoop        Label   Near
                Mov     DI,0000             ;Initialize
destination ptr
                Call    GetResp             ;Get the response
string
                Cmp     AL,00
                Jz      RespDone            ;No error, we're
finished
                Call    SendNAK             ;Error in response,
request retrans
                Jmp     RespLoop

RespDone        Label   Near
                Ret
CGetResp        Endp

;-----------------------------------------------------------
;Get a response string from reader/writer
;        -response string stored starting at ES:DI
;-----------------------------------------------------------
GetResp         Proc    Near

CharLoop        Label   Near
```

```
                Mov     BL,00               ;Initialize for CRC
                Call    ARcvByte            ;Recieve byte
                Stosb
                Xor     BL,AL               ;Calculate CRC
                Cmp     AH,01               ;Repeat until ETX
                Jnz     CharLoop

                Xor     BL,ETX              ;Remove ETX from CRC
                Dec     DI                  ;Get CRC from
response
                Dec     DI
                Lodsb
                Xor     BL,AL               ;Remove CRC from CRC

                Cmp     AL,BL               ;Compare with
calculated CRC
                Jz      RespOK
                Mov     AL,01               ;Return AL=01 if
error
                Ret

RespOK          Label   Near
                Mov     AL,00               ;Return AL=00 if no
error
                Ret
GetResp         Endp

;--------------------------------------------------------
;Display Contents of AX Register
;--------------------------------------------------------
DispStat          Proc    Near
                  Push CX          ;Save registers
                  Push BX
                  Mov  CX,0004h    ;Shift by one nibble
                  Mov  BX,AX             ;Save AX in BX

                  Mov  AL,AH
                  Shr  AL,CL
                  Call DispNibble

                  Mov  AX,BX             ;Reset AX
                  Mov  AL,AH
                  Call DispNibble

                  Mov  AX,BX             ;Reset AX
                  Shr  AL,CL
                  Call DispNibble

                  Mov  AX,BX             ;Reset AX
                  Call DispNibble
```

```
                Mov   AX,BX           ;Reset AX
                Pop   BX
                Pop   CX
                Ret
DispStat        Endp

;-----------------------------------------------------
;Display character and advance cursor
;        -character to be displayed is passed in AL
;-----------------------------------------------------
DisplayChar     Proc     Near
                Push     AX           ;Save contents of AX
                Push     BX           ;Save contents of BX
                Push     CX           ;Save character count
                Mov      AH,0eh            ;Display X's this
should go away)
                Mov      BH,00h            ;Select video page
0
                Mov      CX,01
                Int      10h                  ;Echo character
                Pop      CX           ;Restore CX to character
count
                Pop      BX           ;Restore BX
                Pop      AX           ;Restore AX
                Ret
DisplayChar     Endp

;-----------------------------------------------------
;Display nibble - character to be displayed is
;       passed in the lower nibble of AL
;-----------------------------------------------------
DispNibble        Proc    Near
                  Push    AX           ;Save contents of AX
              And  AL,0Fh         ;Mask AL
              Cmp  AL,0Ah
              Jge  letter         ;Display A-F not digit
              Add  AL,'0'
                  Call    DisplayChar
                  Pop     AX        ;Restore AX
                  Ret
letter        Label     Near
              Sub  AL,0Ah
              Add  AL,'A'
                  Call    DisplayChar
                  Pop     AX        ;Restore AX
                  Ret
DispNibble        Endp

;-----------------------------------------------------
;Send string to screen
;        -pointer to string passed in DS:SI
```

```
;         -location on screen passed in DX (row,col)
;---------------------------------------------------
StrScr              Proc     Near
                    Push     AX
                    Push     BX
                    Push     CX

                    Mov      AH,09              ;Interrupt 10
service 9
                    Mov      BH,00              ;Video page 0
                    Lodsb
                    Mov      BL,AL              ;Load attribute
byte
                    Mov      CX,0001            ;Only display
one of each char
Scrloop             Label    Near
                    Call     CurPos             ;Move cursor
                    Lodsb
                    Or       AL,AL              ;Our end of
string byte?
                    Jz       ScrDone            ;If so, we're
done...
                    Int      10h                ;Otherwise
display character
                    Inc      DX                 ;Increment
cursor position
                    Jmp      ScrLoop            ;Repeat with
next character
ScrDone             Label    Near

                    Pop      CX
                    Pop      BX
                    Pop      AX
                    Ret
StrScr              Endp

;---------------------------------------------------
;Draw box frame for dialog
;---------------------------------------------------
DrawBox      Proc     Near
             Mov      DX,0517h
             Call     CurPos
             Mov      AH,09              ;Service 9
             Mov      BH,00              ;Primary video page
             Mov      BL,07              ;Character attribute

             Mov      CX,0001            ;Display only one
             Mov      AL,0C9h            ;Upper left corner
             Int      10h

             Mov      DX,0518h           ;Top bar
```

```
                Call    CurPos
                Mov     AL,0CDh
                Mov     CX,001Fh
                Int     10h

                Mov     DX,0537h            ;Upper right corner
                Call    CurPos
                Mov     AL,0BBh
                Mov     CX,0001
                Int     10h

                Mov     DX,0E17h            ;Lower left corner

                Call    CurPos
                Mov     AL,0C8h
                Int     10h

                Mov     DX,0E18h            ;Bottom bar
                Call    CurPos
                Mov     AL,0CDh
                Mov     CX,001Fh
                Int     10h

                Mov     DX,0E37h            ;Lower right corner
                Call    CurPos
                Mov     AL,0BCh
                Mov     CX,0001
                Int     10h

                Mov     DX,0617h            ;Left side
                Mov     AL,0BAh
LSide           Label   Near
                Call    CurPos
                Int     10h
                Add     DX,0100h
                Cmp     DX,0E17h
                Jne     LSide

                Mov     DX,0637h            ;Right side
RSide           Label   Near
                Call    CurPos
                Int     10h
                Add     DX,0100h
                Cmp     DX,0E37h
                Jne     RSide
                Ret
DrawBox         Endp

;---------------------------------------------------------
;Clear screen
;---------------------------------------------------------
```

```
ClrScr      Proc    Near
            Push    AX
            Push    BX
            Push    CX
            Push    DX

            Mov     DX,0000h            ;Home cursor
            Call    CurPos

            Mov     AH,09h              ;Fill screen with
spaces
            Mov     CX,0800h
            Mov     AL,020h
            Mov     BH,00h
            Mov     BL,07h
            Int     10h

            Mov     DX,0000             ;Home cursor yet
again
            Call    CurPos

            Pop     DX
            Pop     CX
            Pop     BX
            Pop     AX
            Ret
ClrScr      Endp

;--------------------------------------------------
;Set cursor position
;       -cursor row passed in DH
;       -cursor column passed in DL
;--------------------------------------------------
CurPos      Proc    Near
            Push    AX
            Push    BX

            Mov     AH,02               ;Interrupt 10
service 2
            Mov     BH,00               ;Video page 0
            Int     10h

            Pop     BX
            Pop     AX
            Ret
CurPos      Endp

;--------------------------------------------------
;Data area
;       - Console messages
;       - ISO command strings
```

```
;-------------------------------------------------------
;.Data

;Console messages

STitle          DB      0Ah
;Char attribute (clr)
                DB      'Boot Integrity Token System'
;String
                DB      00h
;End of string marker
SSTitle         DB      0Ah
                DB      'DOS-BITS Version 1'
                DB      00h
InsrtCrd        DB      07h
                DB      'Please insert card...'
                DB      00h
SErase          DB      07h
                DB      '           '
                DB      00h
Erase           DB      07h
                DB      '                              '
                DB      00h
PwdPrmpt        DB      07h
                DB      'Password: '
                DB      00h
BadPass         DB      07h
                DB      'Incorrect. Please try again.'
                DB      00h
Corrct          DB      07h
                DB      'Loading operating system...'
                DB      00h
CdLck           DB      0Fh
                DB      'Card is locked!'
                DB      00h
CdLck2          DB      0Fh
                DB      'Please see Security Manager.'
                DB      00h
KbdStat         DB      07h
                DB      'Keyboard Status: '
                DB      00h
FileChk         DB      07h
                DB      'Checking files: '
                DB      00h
File1           DB      07h
                DB      'IO.SYS'
                DB      00h
File2           DB      07h
                DB      'MSDOS.SYS'
                DB      00h
File3           DB      07h
```

```
                DB      'COMMAND.COM'
                DB      00h
File4           DB      07h
                DB      'CONFIG.SYS'
                DB      00h
BadFile         DB      07h
                DB      'Missing or corrupted system
file!'
                DB      00h
OKFile          DB      07h
                DB      'Files OK.  Booting...'
                DB      00h

;Shared secret (card/PC) data

SharSec         DB      00h

;Reader and card command strings

InitRdr         DB      04h,03h,0Fh,0D0h,0Ah
StCrdTp         DB      03h,02h,02h,00h
RstCard         DB      04h,03h,0Fh,0D0h,0Ah
PowerOn         DB      04h,6Eh,01h,00h,00h
PowerOff        DB      01h,4Dh
SelPbrFl        DB      06h,0DBh,00h,0A2h,02h,7Eh,08h

;Operating system filenames

SysFile1        DB      'IO      SYS'
SysFile2        DB      'MSDOS   SYS'
SysFile3        DB      'COMMAND COM'

;End, data area

Cseg            Ends

END
```

What is claimed is:

1. A method for reducing the possibility of corruption of critical information required in the operation of a computer comprising:

storing the critical information in a device,

communicating authorization information between the device and the computer, and

causing the device, in response to the authorization information, to enable the computer to read the critical information stored in the device.

2. The method of claim 1 wherein the steps of communicating authorization information and enabling the computer to read comprise

a user entering a password, and

the device verifying the password.

3. The method of claim 1 wherein the authorization information comprises biometric information about a user.

4. The method of claim 1 further comprising

storing a password in the device,

in the device, comparing the stored password with an externally supplied password, and

basing a determination of whether to enable the computer to read the stored critical information on the results of the step of comparing the passwords.

5. The method of claim 1 wherein the device comprises a microprocessor and a memory.

6. The method of claim 5 wherein the device comprises a pocket-sized card containing the microprocessor and the memory.

7. The method of claim 1 wherein said critical information comprises boot-sector information used in starting the computer.

8. The method of claim 1 wherein said critical information comprises executable code.

9. The method of claim 1 wherein said critical information comprises system data or user data.

10. The method of claim 1 further comprising
the computer booting itself from the critical information read from the device.

11. The method of claim 1 wherein the computer booting itself comprises executing modified boot code in place of normal boot code.

12. The method of claim 11 further comprising storing the modified boot code in the form of a BIOS extension.

13. The method of claim 1 wherein the steps of communicating authorization information and enabling the computer to read, comprise
the device passing to the computer, secret information shared with the computer, and
the computer validating the shared secret information passed from the device.

14. The method of claim 1 wherein the authorization information comprises file signatures for executable code.

15. The method of claim 1 wherein the authorization information comprises a user's cryptographic key.

16. The method of claim 13 wherein the shared secret information comprises a host access code.

17. The method of claim 1 wherein the stored critical information includes file integrity information.

18. A method of booting a computer, comprising

storing, in a device which is separate from the computer, boot information, user authorization information, and device authorization information in the form of a secret shared with the computer,

providing a communication link between the device and the computer,

receiving possibly valid authorization information from a user,

in the device, checking the possibly valid authorization information against the stored user authorization information to determine validity,

if the password is determined to be valid, passing the boot information and the shared secret information from the device to the computer,

in the computer, checking the validity of the shared secret information, and

if the shared secret information is valid, using the boot information in booting the computer.

19. A method for initializing a device for use in reducing the possibility of corruption of critical information required in the operation of a computer comprising:

storing the critical information in memory on the device,

storing authorization information in memory on the device, and

configuring a microprocessor in the device to release the critical information to the computer only after completing an authorization routine based on the authorization information.

20. The method of claim 19 wherein said critical information comprises boot information.

21. The method of claim 20 further comprising storing file integrity information in the memory of the device.

22. The method of claim 20 further comprising storing system or user data in the device.

23. The method of claim 20 further comprising storing executables in the memory of the device.

24. A portable intelligent token for use in effecting a secure startup of a host computer comprising

a housing,

a memory within said housing, the memory containing information needed for startup of the host computer, and

a channel for allowing the memory to be accessed externally of the housing.

25. The token of claim 24 wherein said memory also contains a password for authorization, said token further comprising

a processor for comparing the stored password with externally supplied passwords.

26. The token of claim 24 wherein the memory stores information with respect to multiple host computers.

27. The token of claim 24 wherein said housing comprises a pocket-sized card.

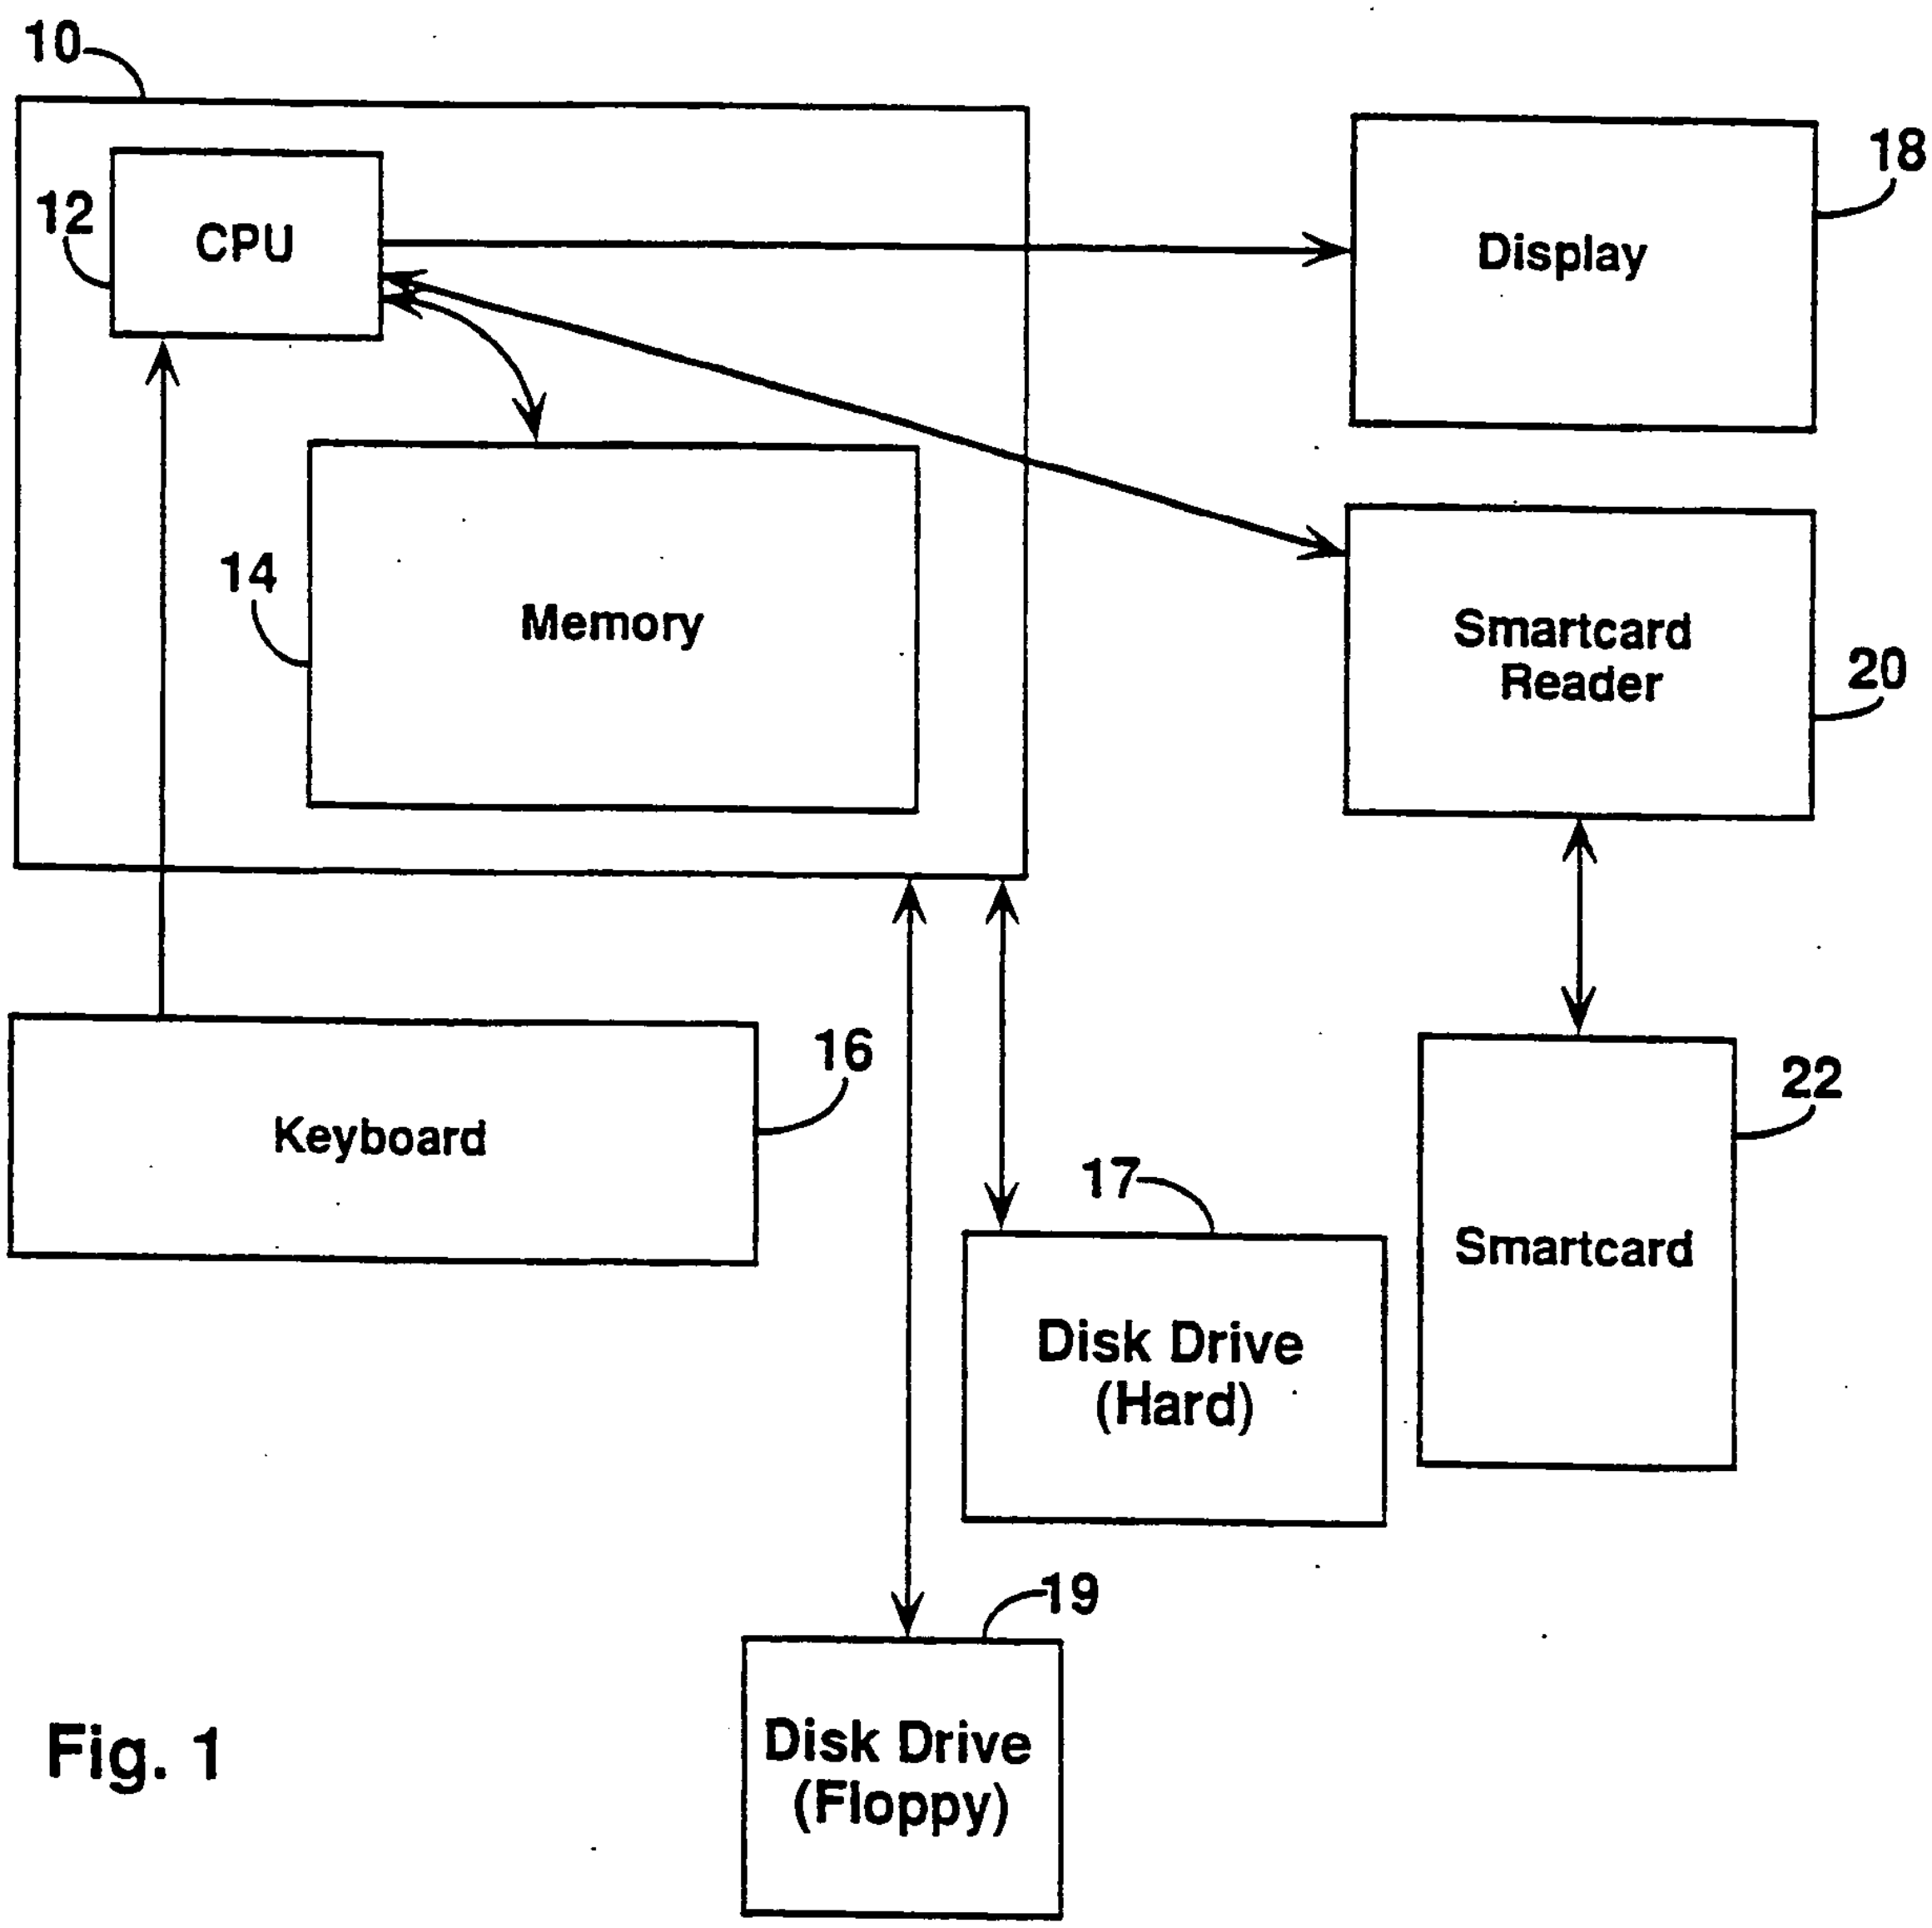
10
CPU
12
Memory
14
Display
18
Smartcard
Reader
20
Keyboard
16
17
Disk Drive
(Hard)
Smartcard
22
19
Disk Drive
(Floppy)

Fig. 1

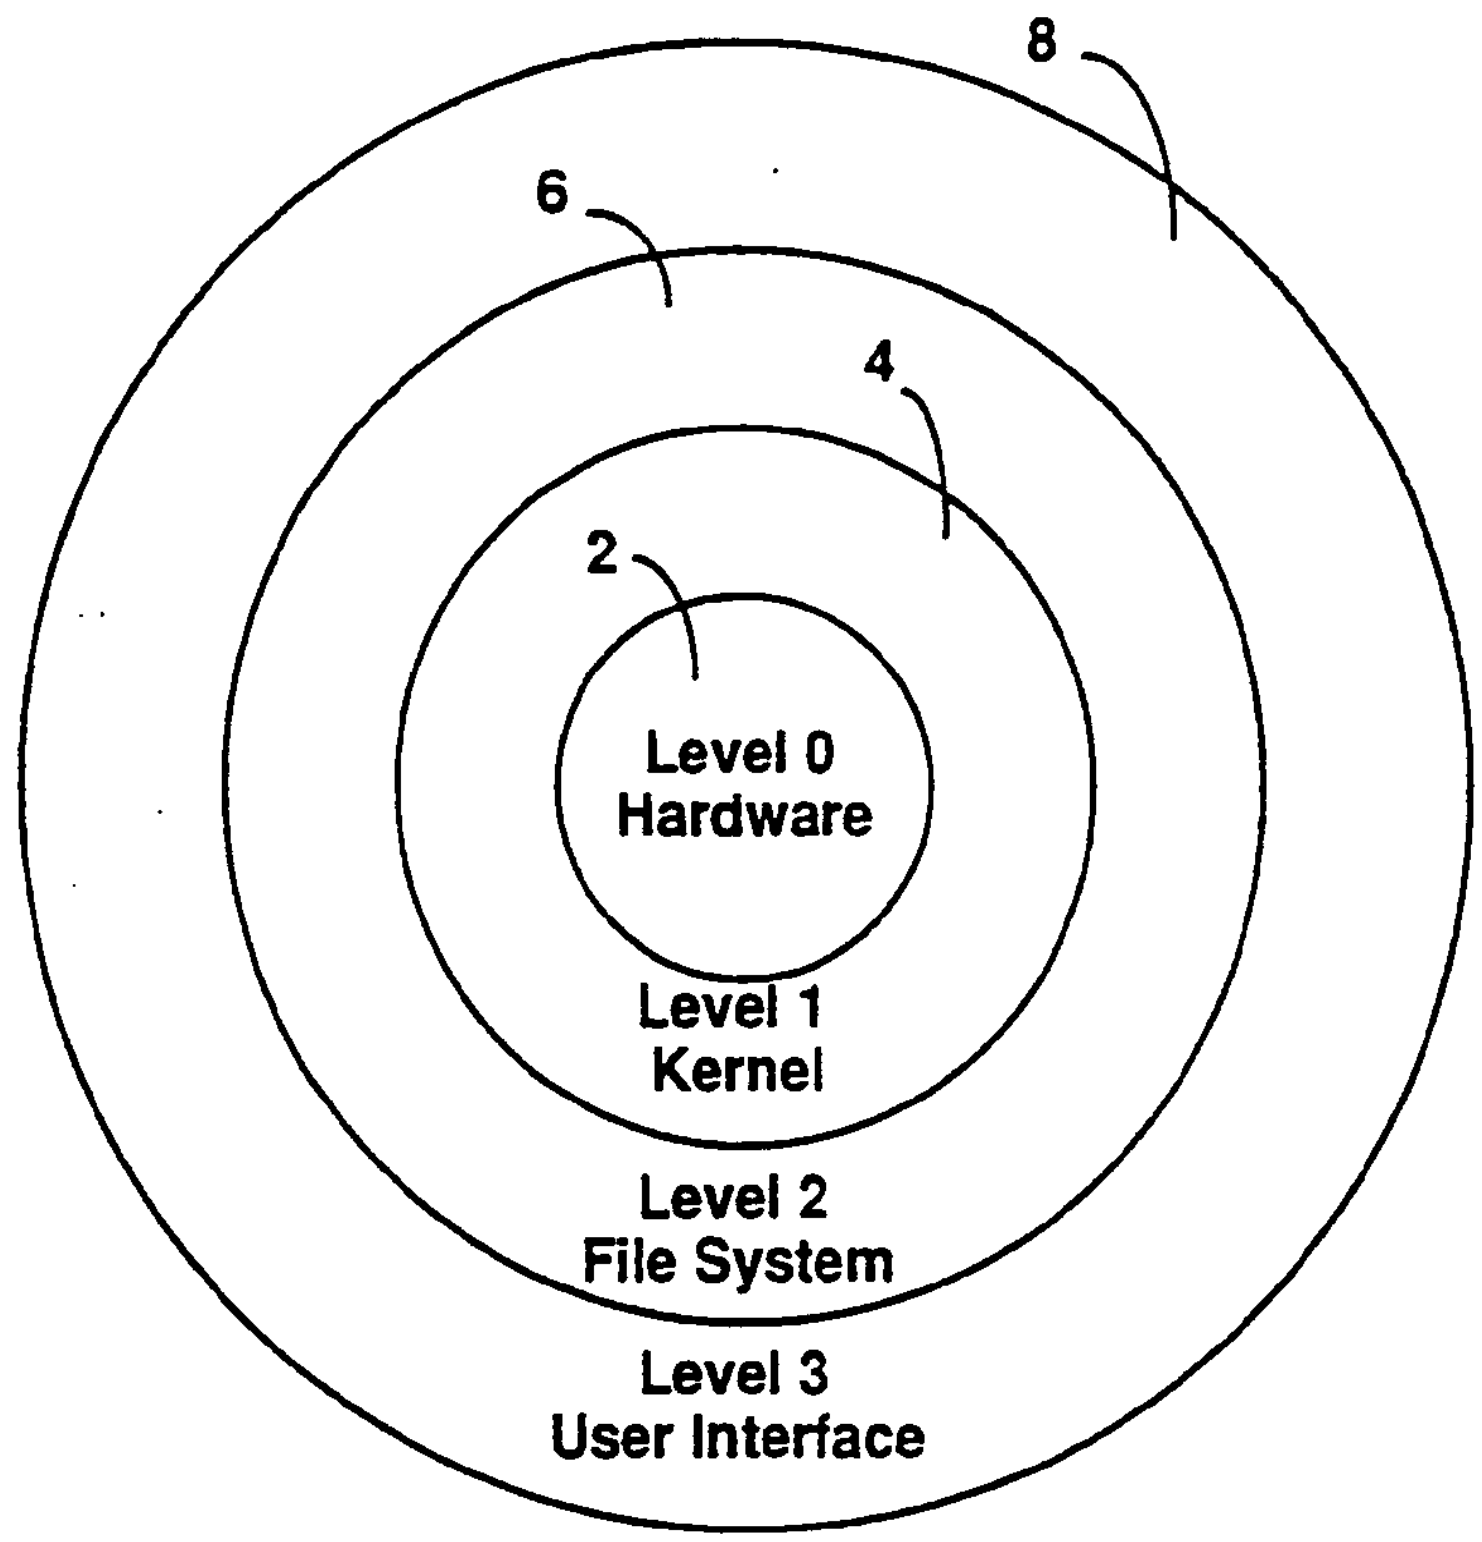
8
6
4
2
Level 0
Hardware
Level 1
Kernel
Level 2
File System
Level 3
User Interface

Fig. 2

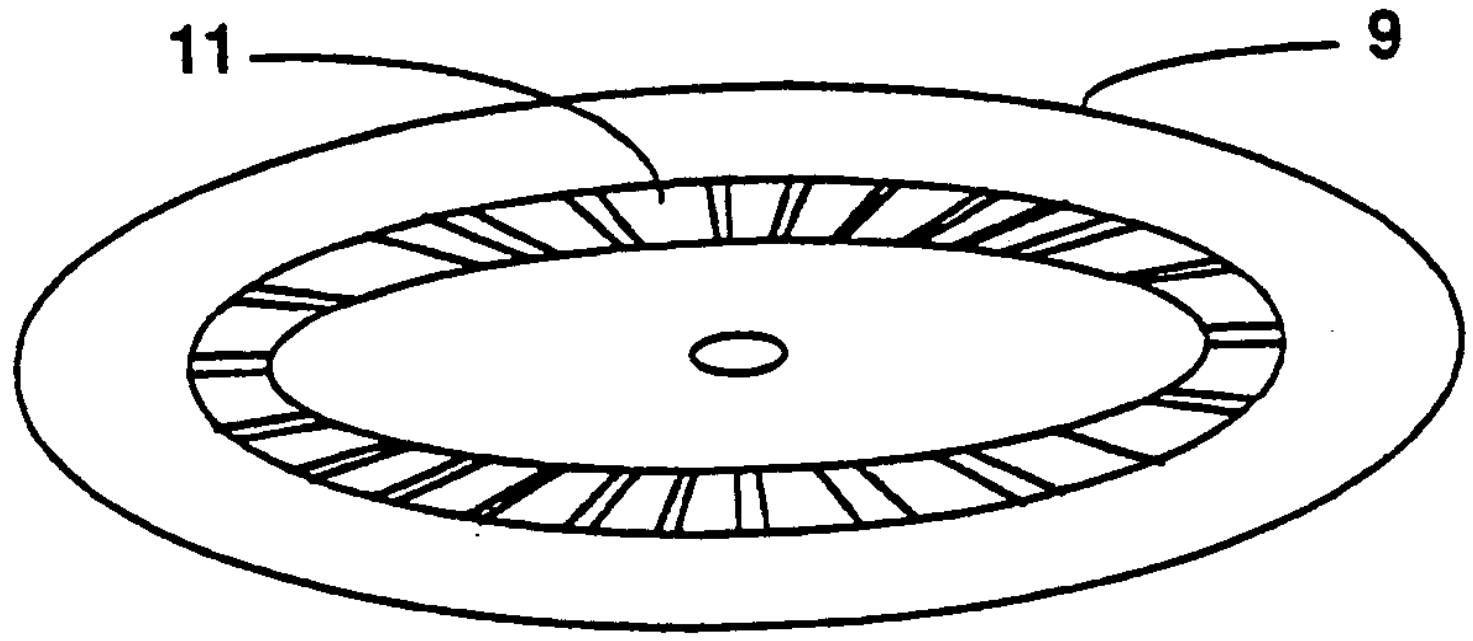

Fig. 3

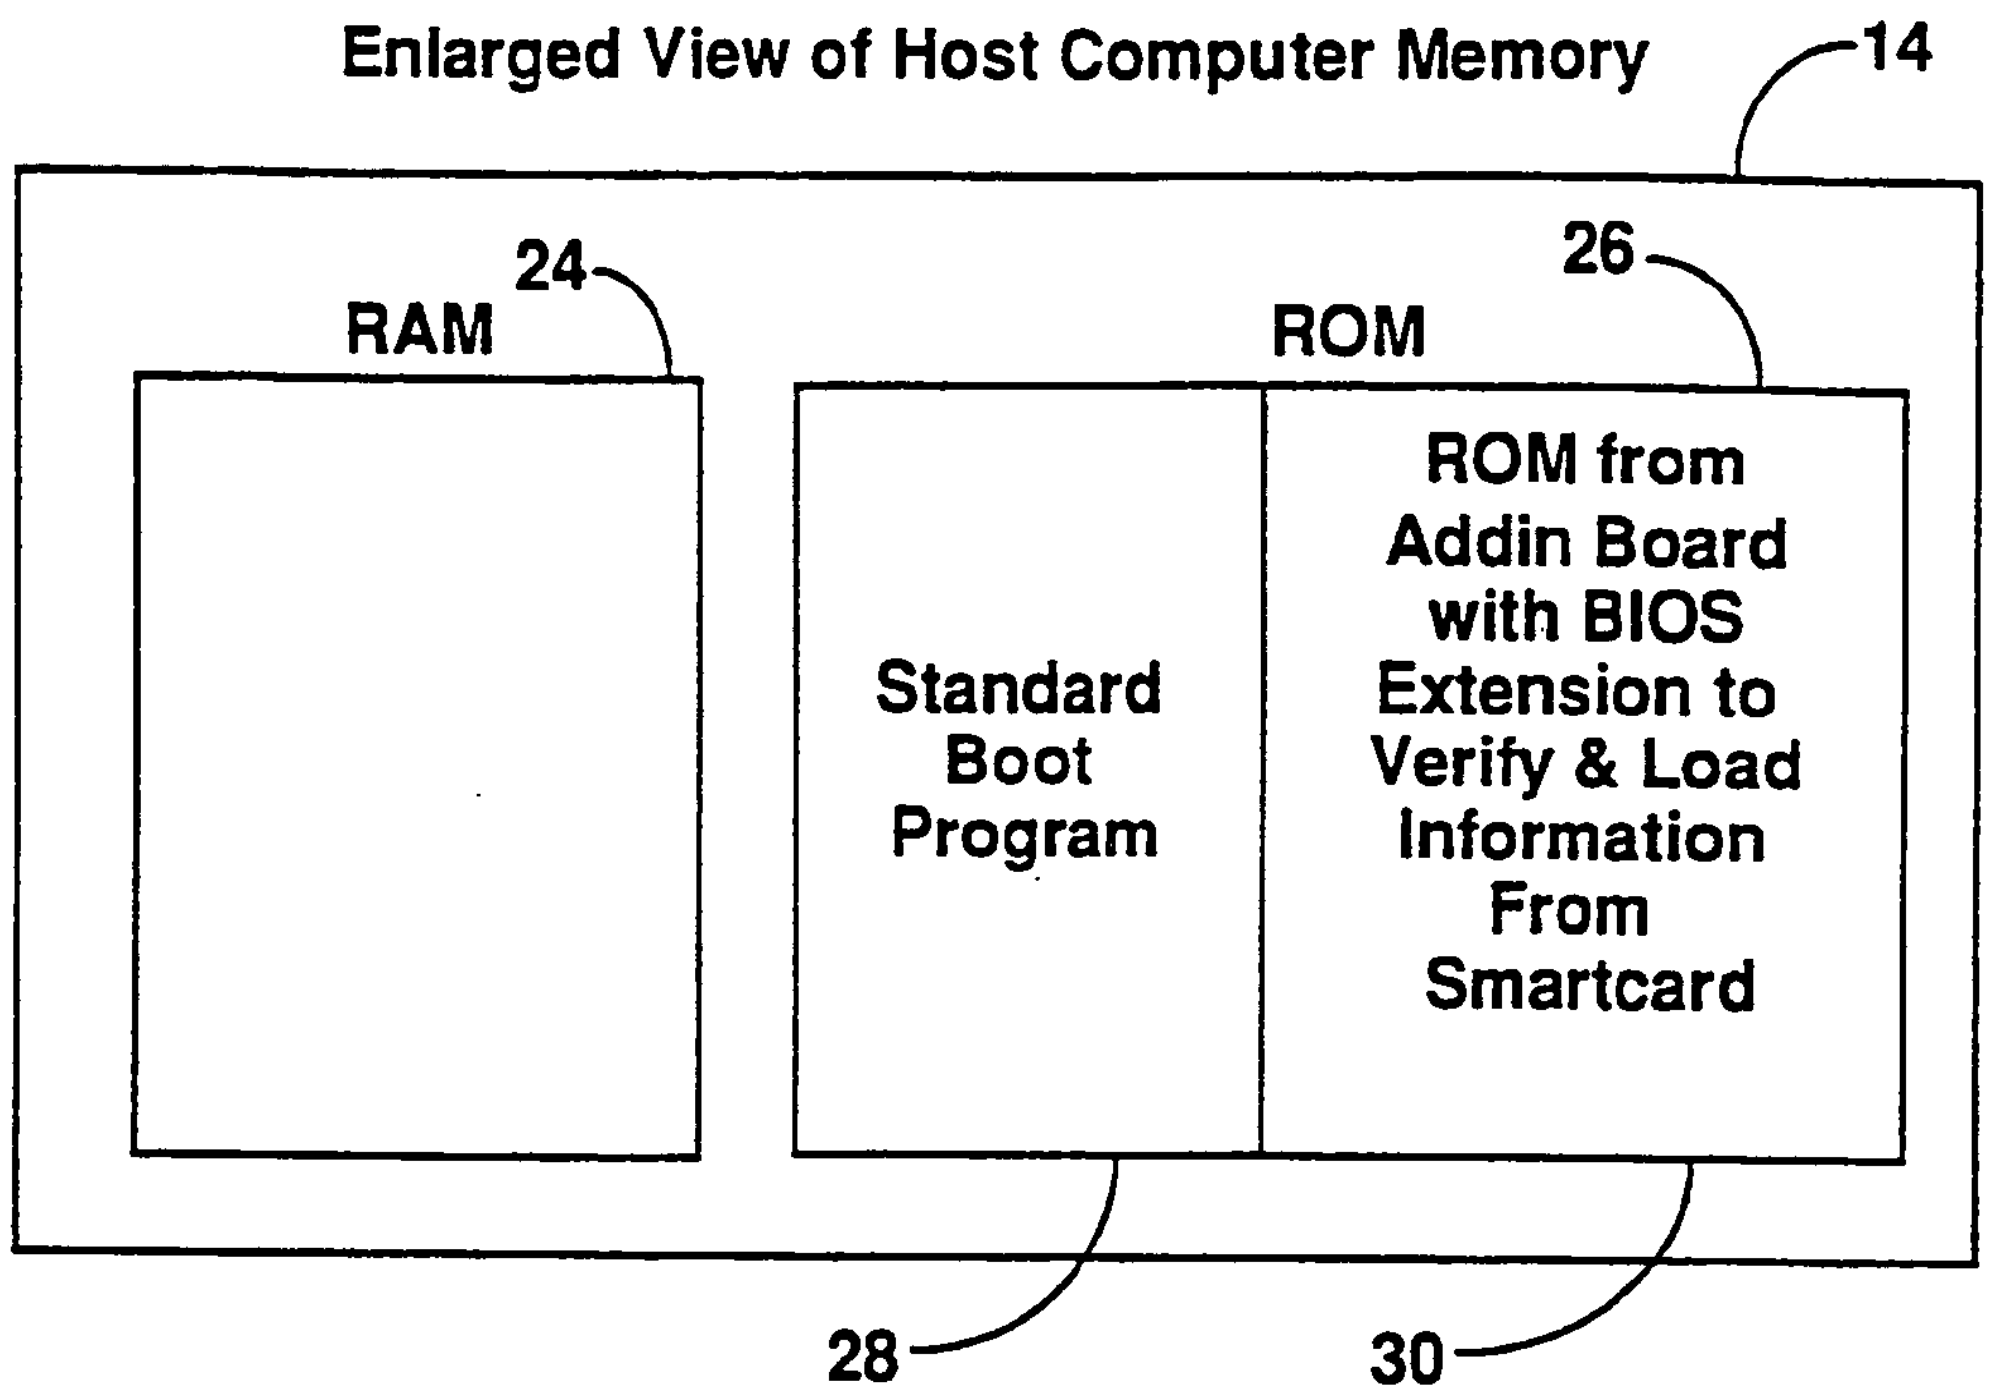
Enlarged View of Host Computer Memory
14
RAM
24
ROM
26
Standard Boot Program
ROM from Addin Board with BIOS Extension to Verify & Load Information From Smartcard
28
30

Fig. 4

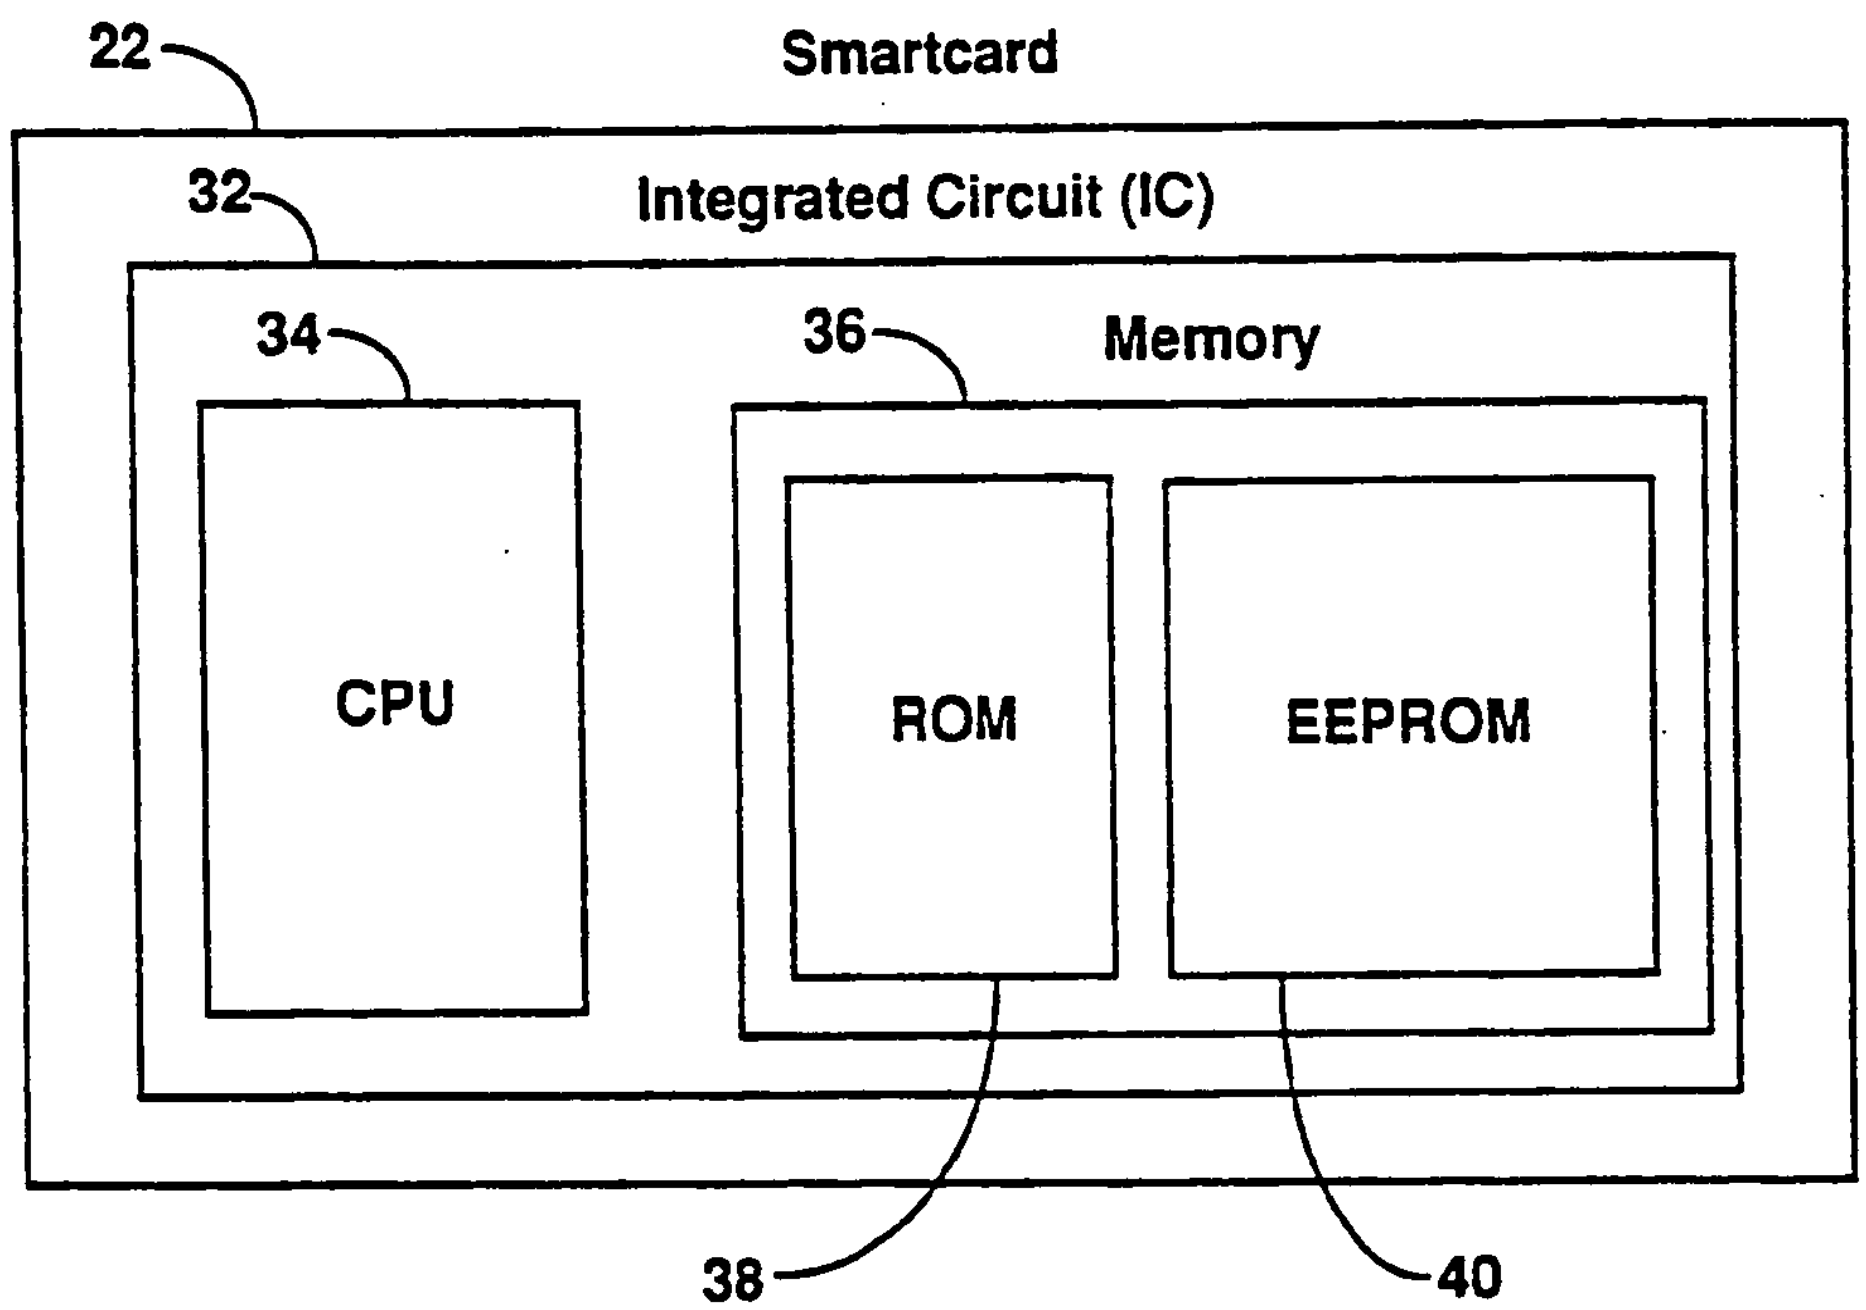
22
Smartcard
32
Integrated Circuit (IC)
34
36
Memory
CPU
ROM
EEPROM
38
40

Fig. 5

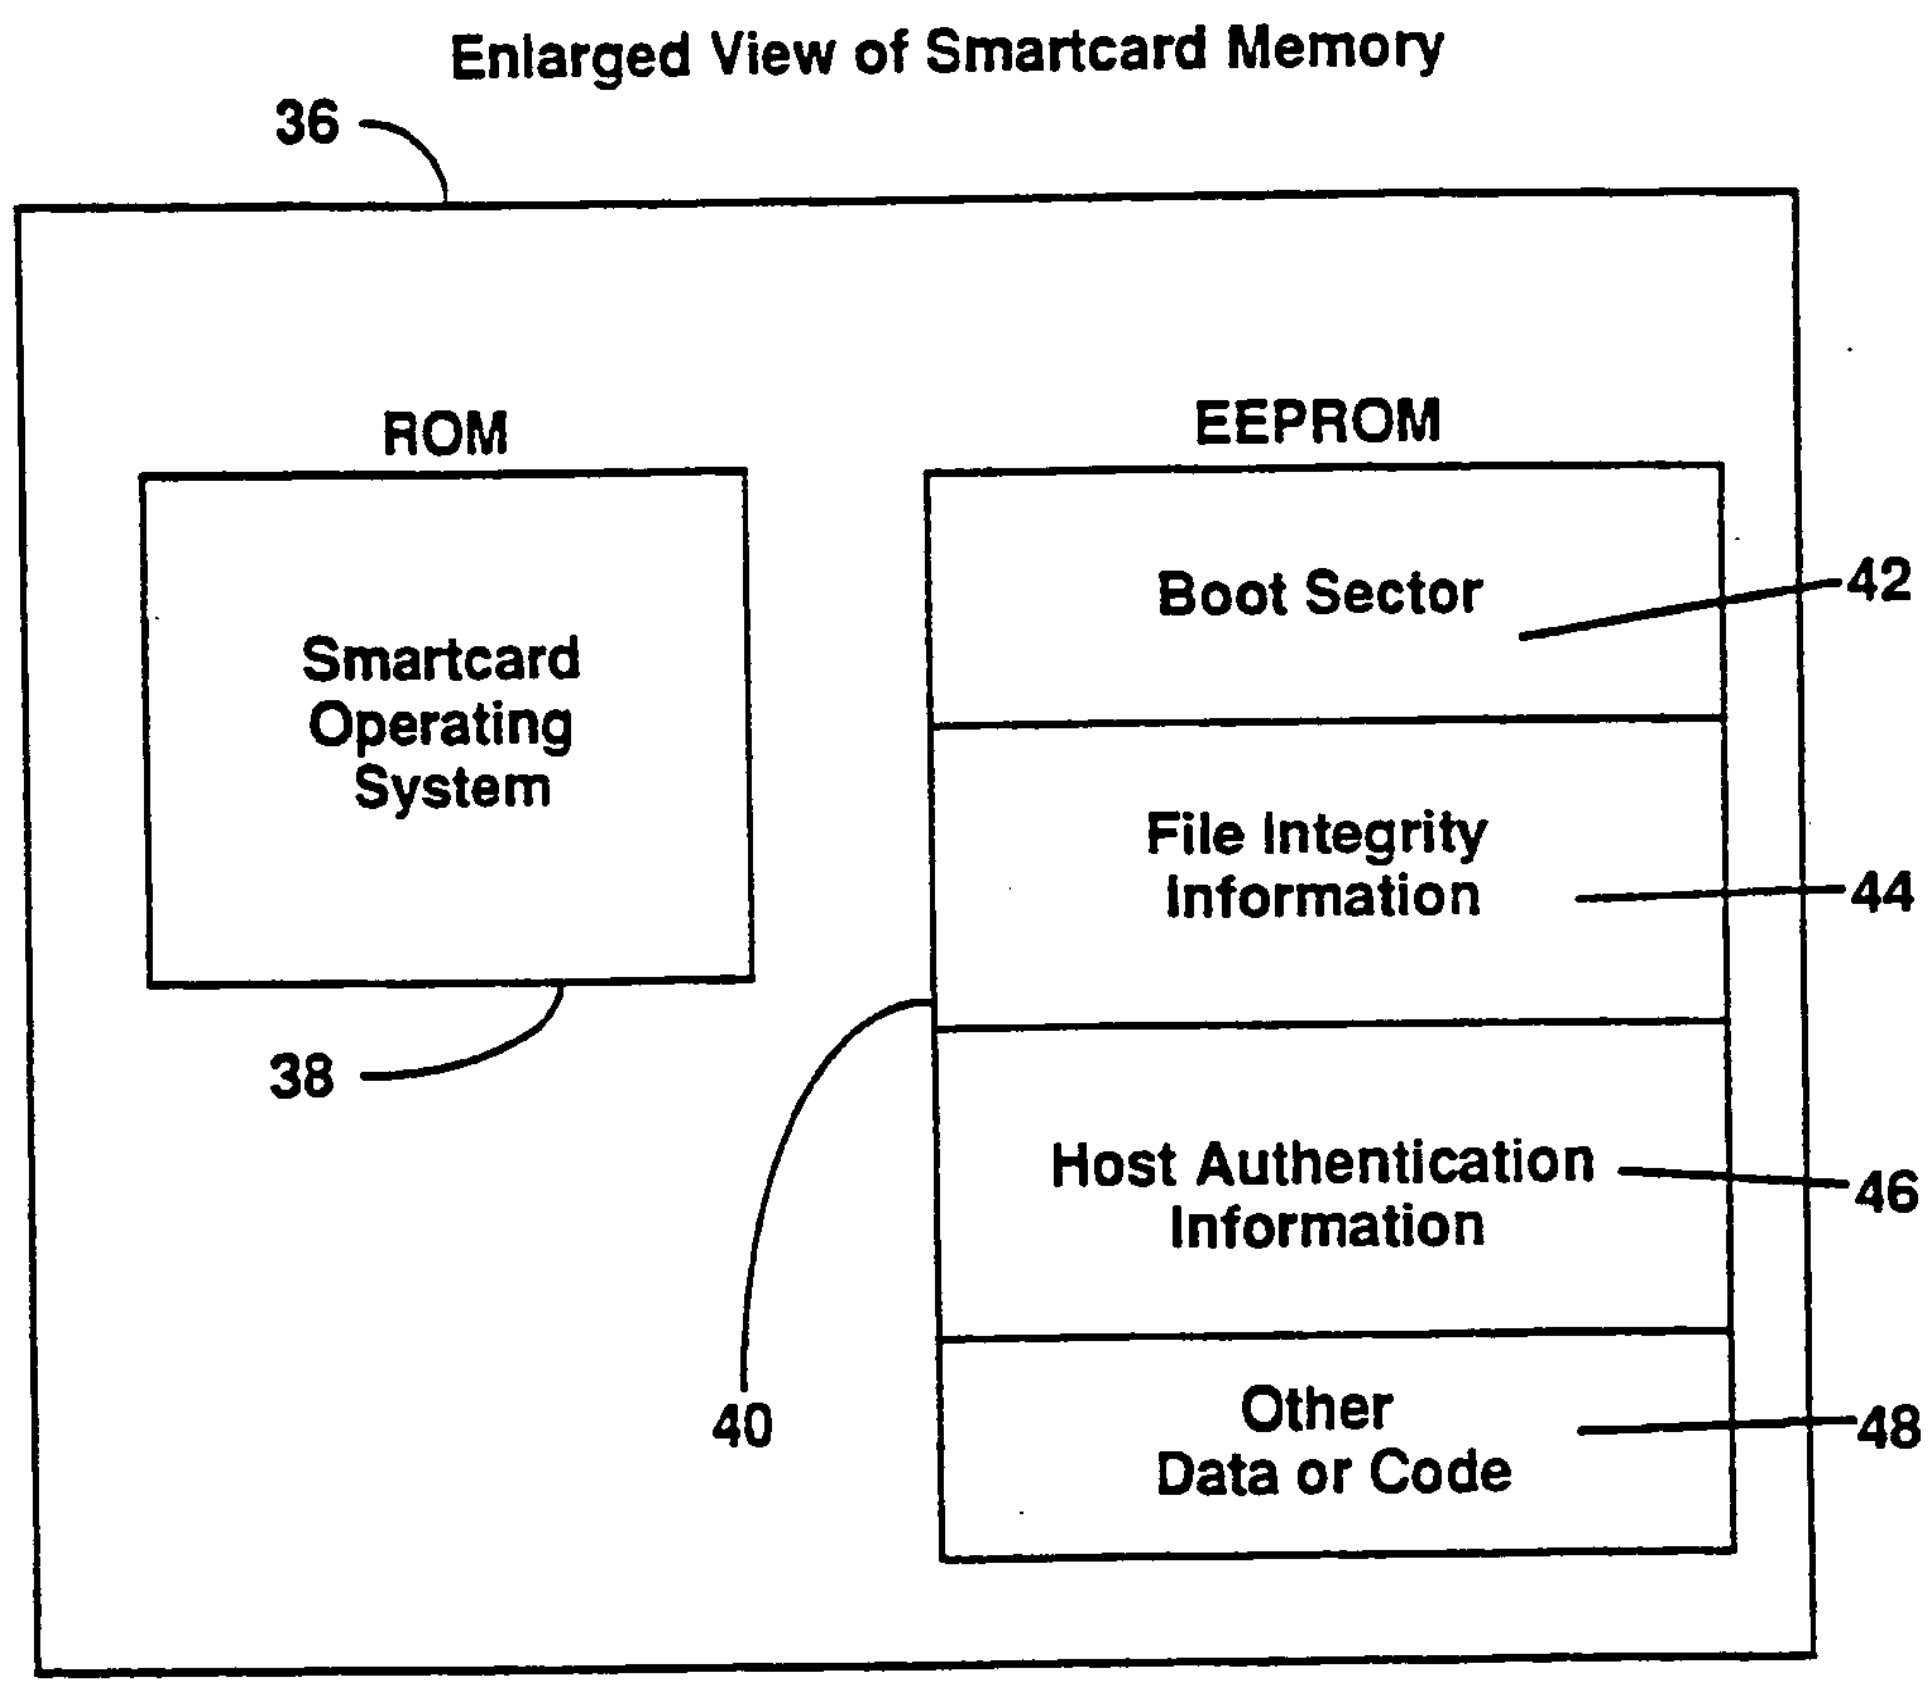
Enlarged View of Smartcard Memory
36
ROM
Smartcard Operating System
38
EEPROM
Boot Sector
42
File Integrity Information
44
Host Authentication Information
46
Other Data or Code
48
40

Fig. 6

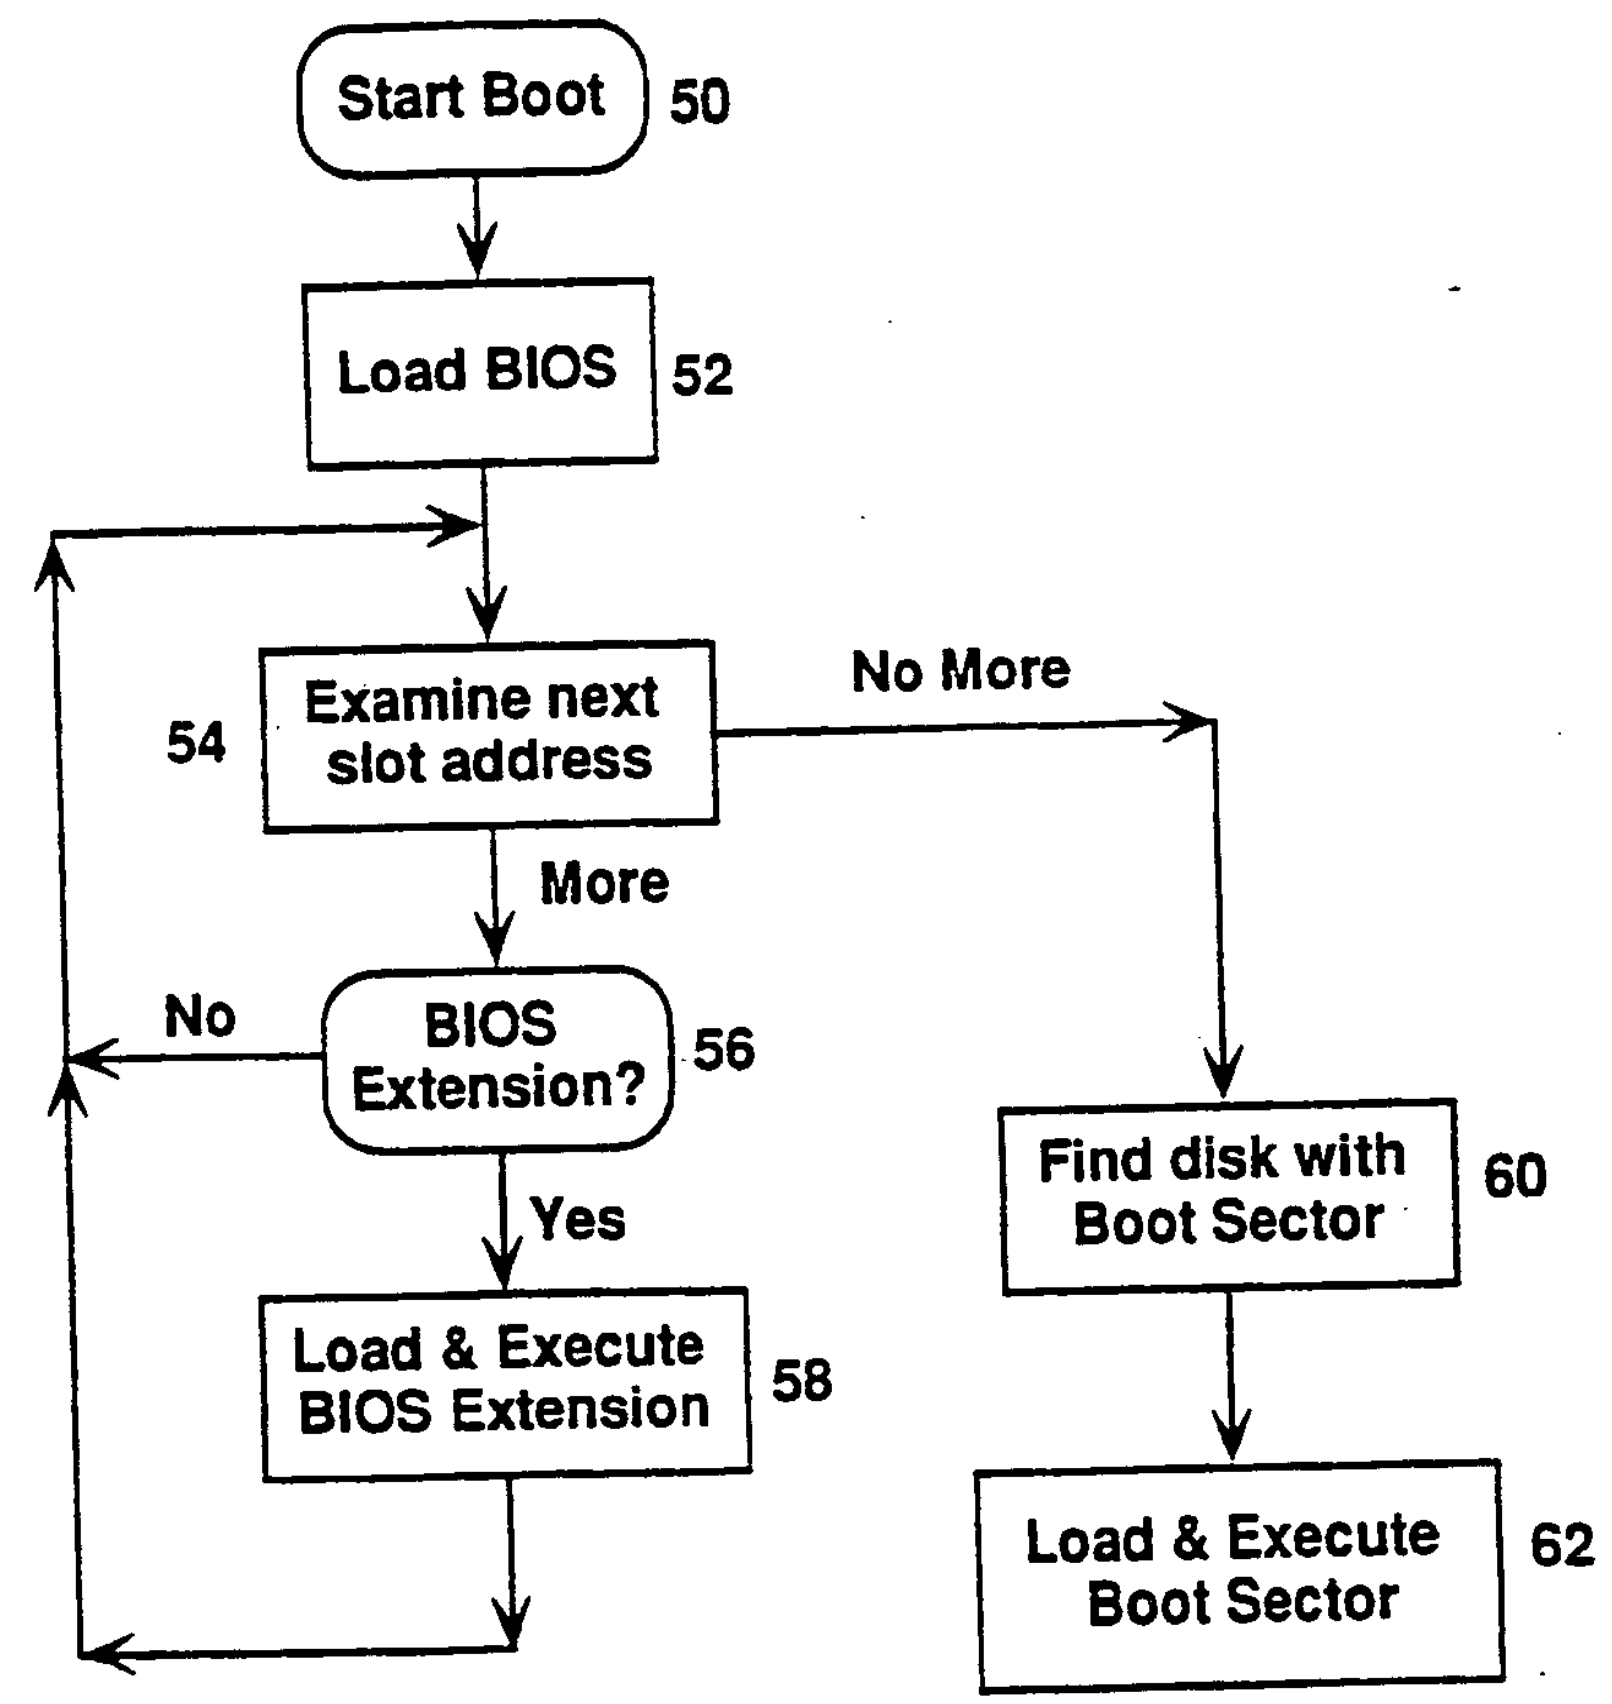
Start Boot
50
Load BIOS
52
Examine next slot address
54
No More
More
BIOS Extension?
56
No
Yes
Load & Execute BIOS Extension
58
Find disk with Boot Sector
60
Load & Execute Boot Sector
62

Fig. 7

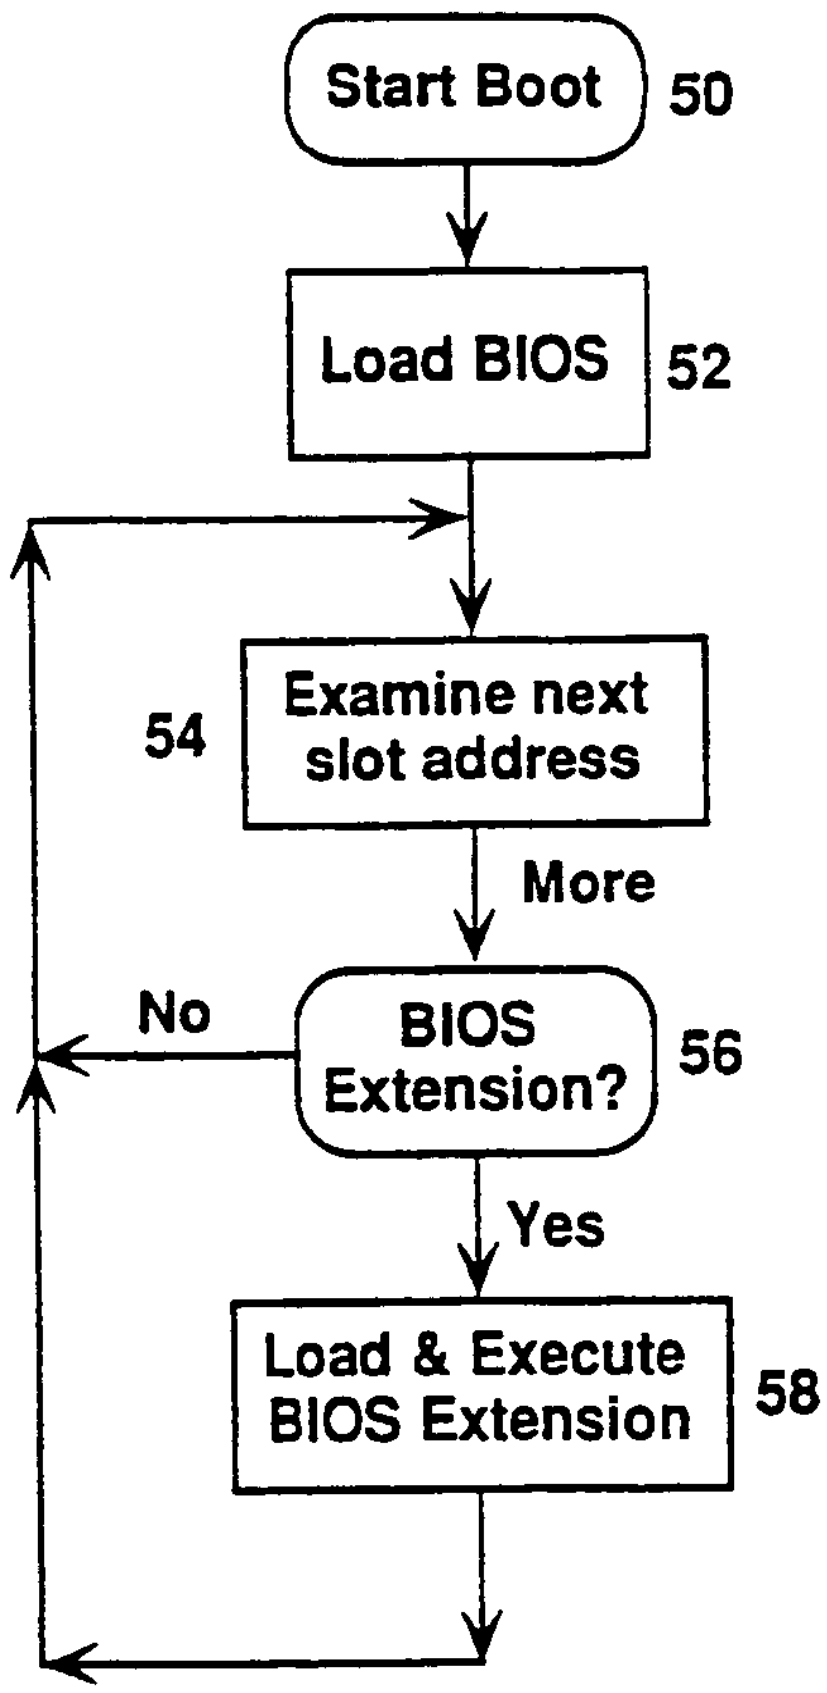
Start Boot
50
Load BIOS
52
Examine next slot address
54
More
BIOS Extension?
56
No
Yes
Load & Execute BIOS Extension
58

Fig. 8

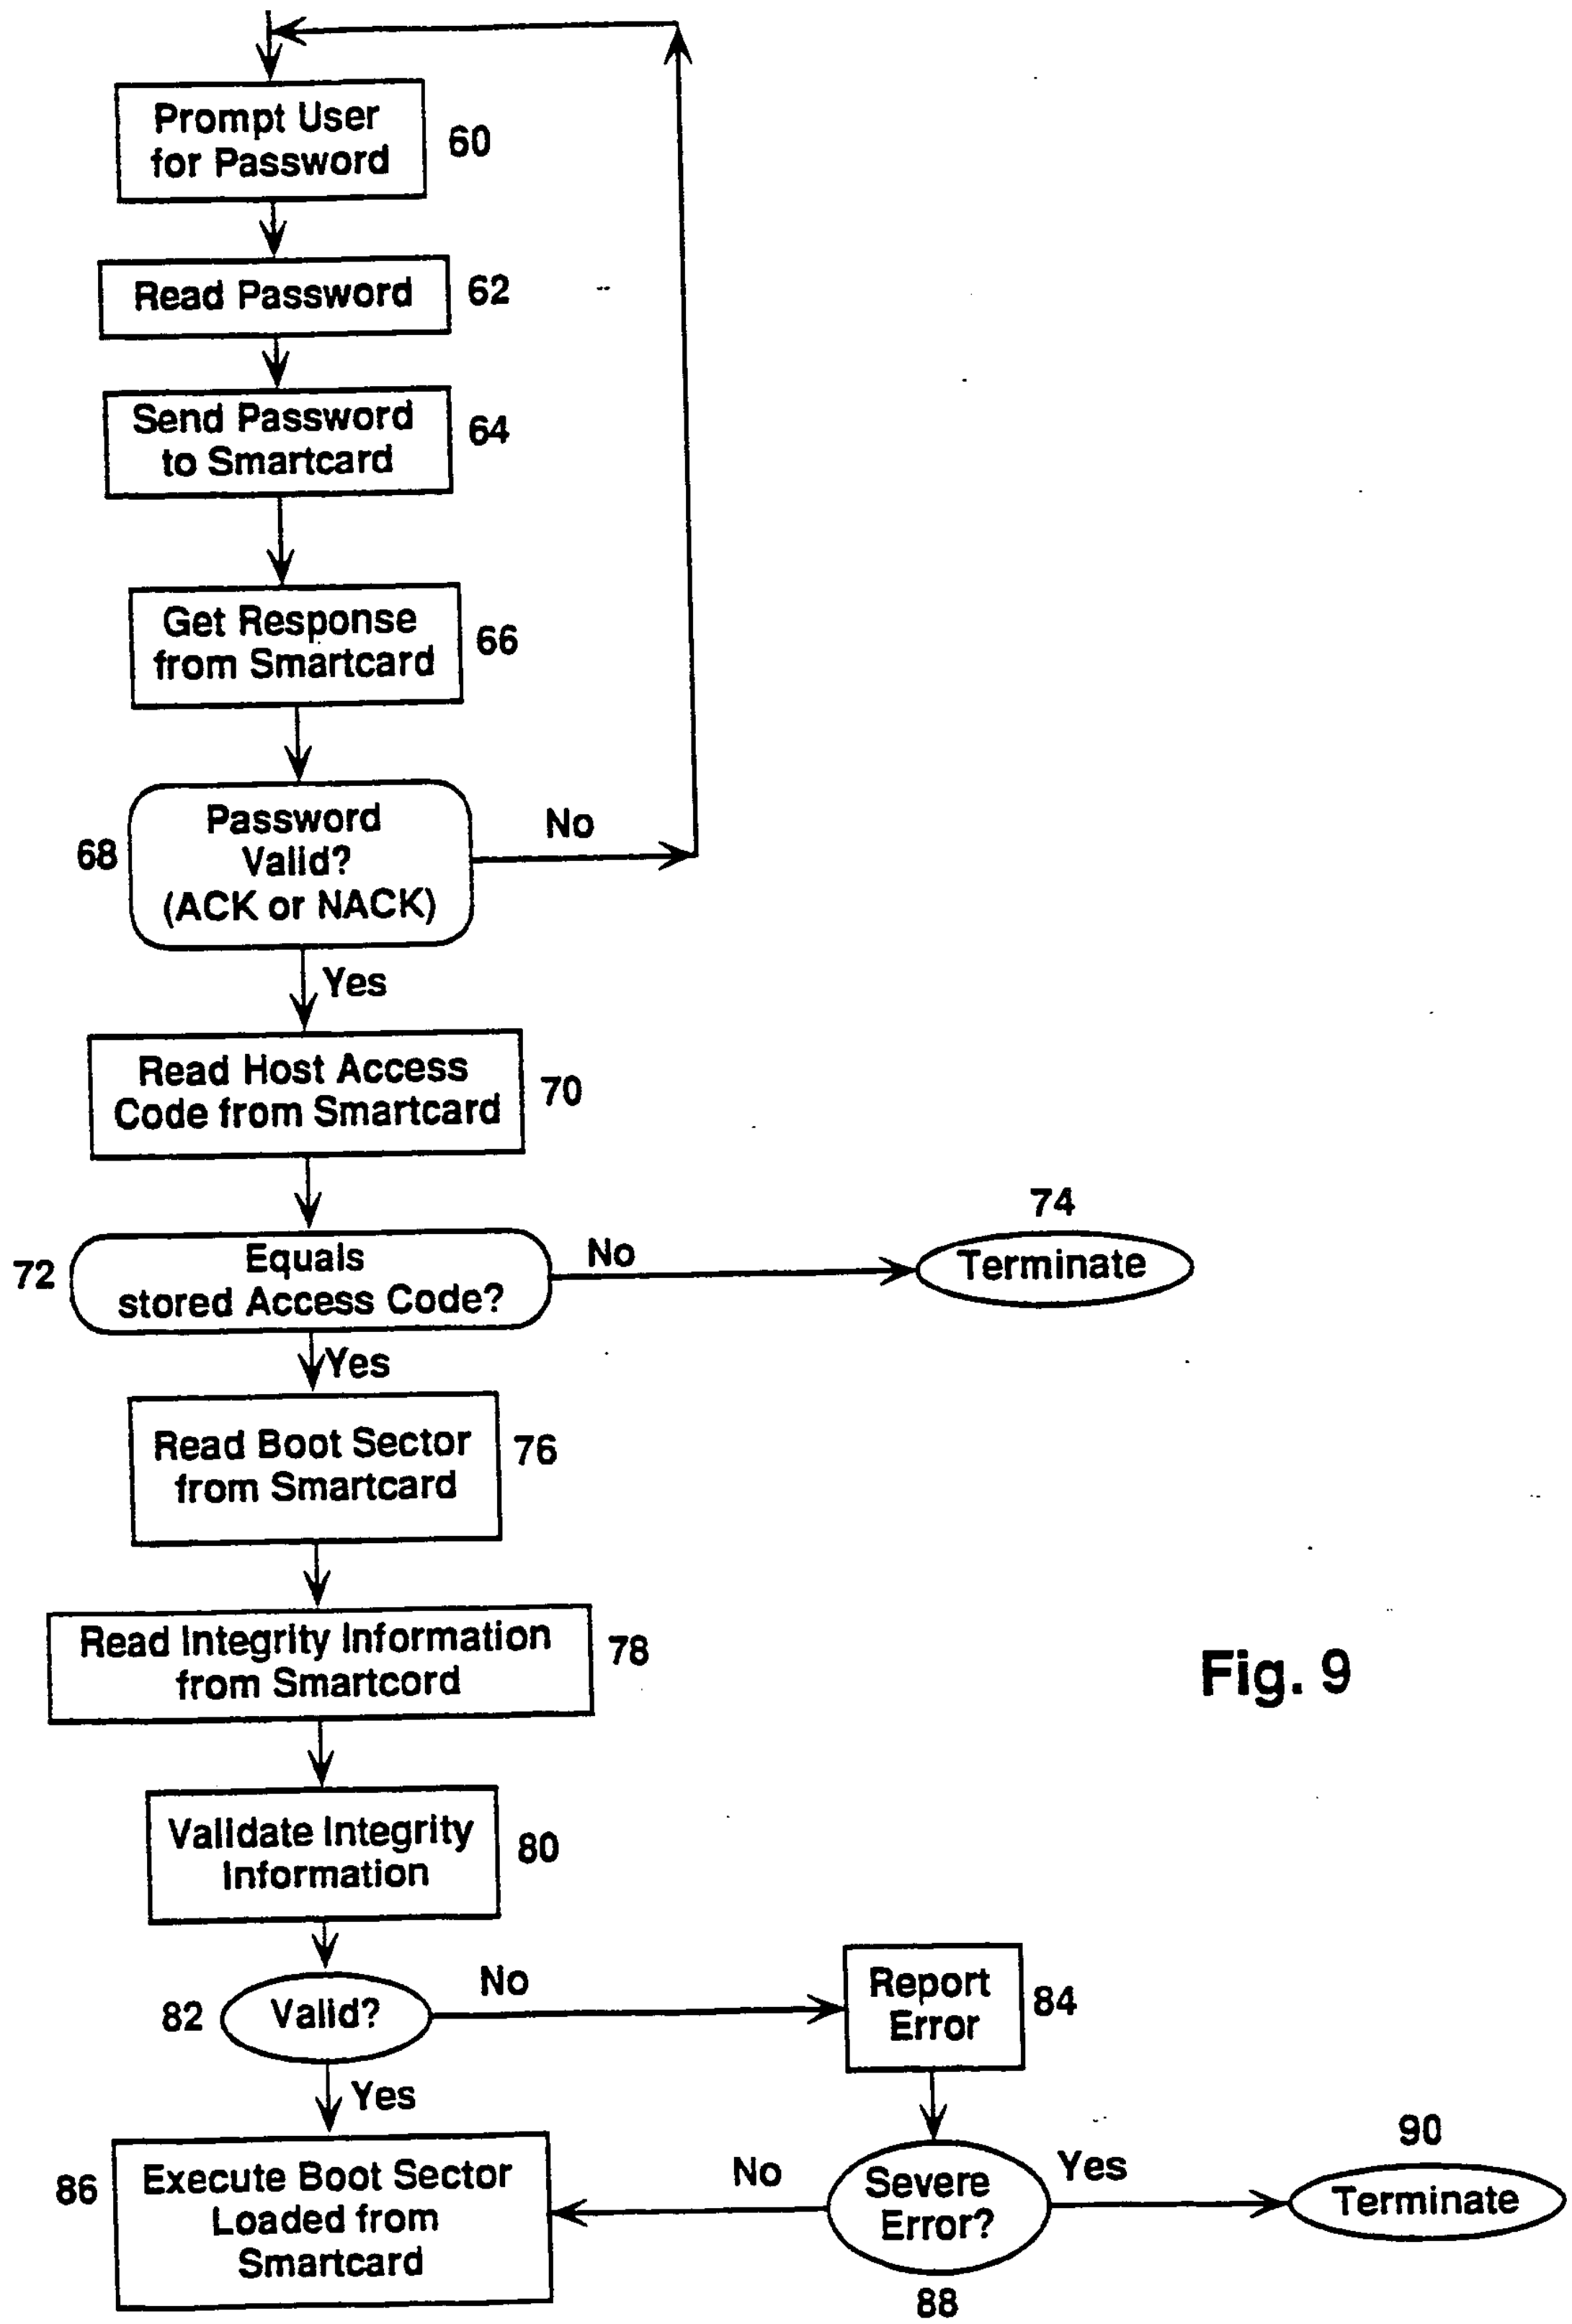

Prompt User for Password
60
Read Password
62
Send Password to Smartcard
64
Get Response from Smartcard
66
Password Valid? (ACK or NACK)
68
No
Yes
Read Host Access Code from Smartcard
70
Equals stored Access Code?
72
No
Terminate
74
Yes
Read Boot Sector from Smartcard
76
Read Integrity Information from Smartcord
78
Validate Integrity Information
80
Valid?
82
No
Report Error
84
Yes
Execute Boot Sector Loaded from Smartcard
86
Severe Error?
88
No
Yes
Terminate
90

Fig. 9

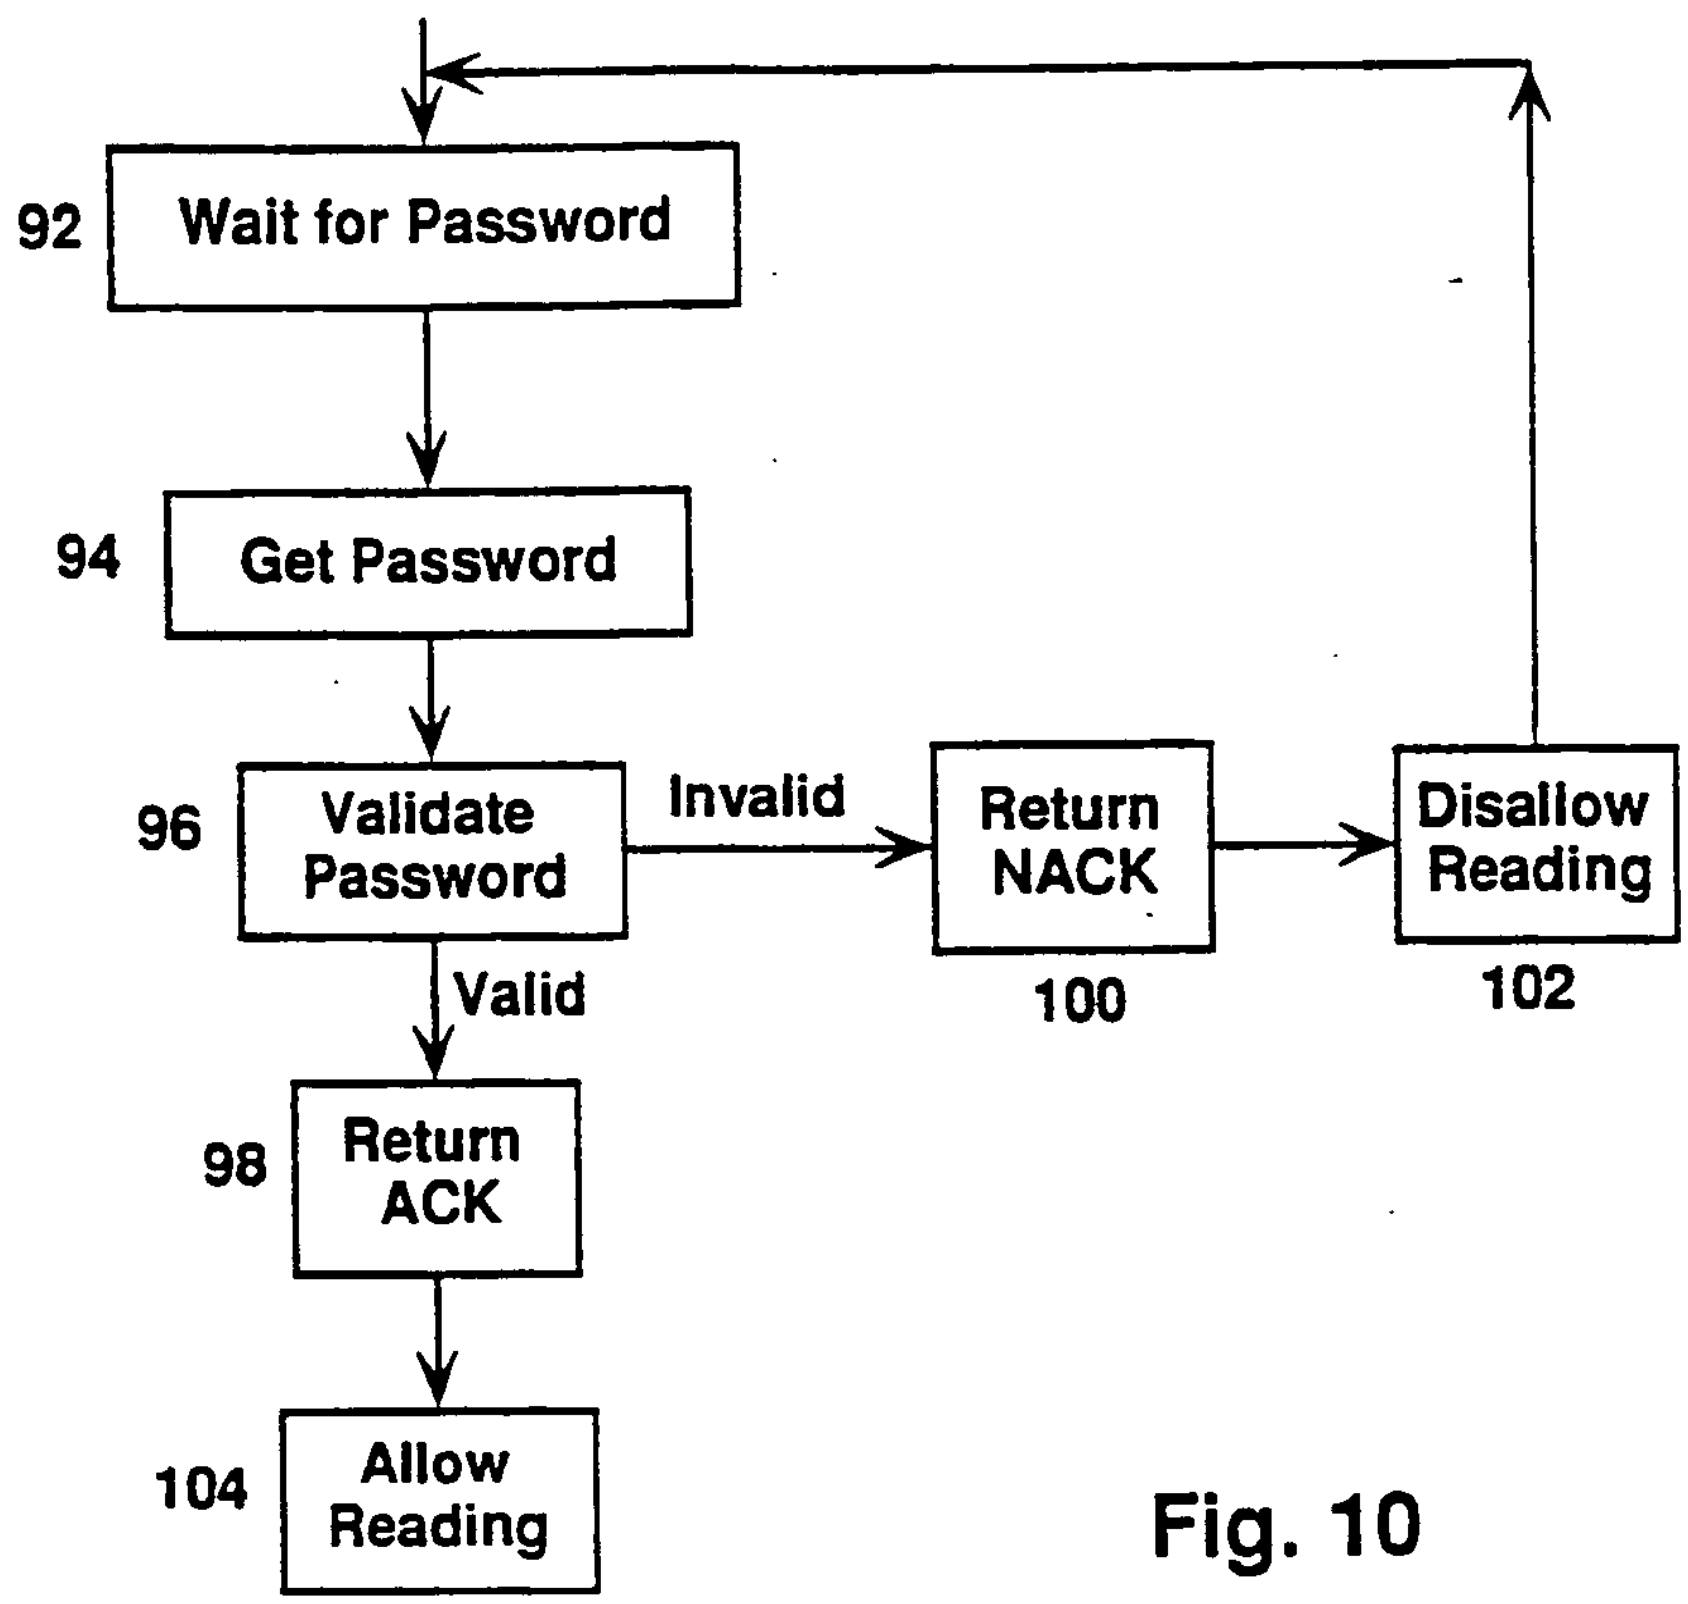

Wait for Password
92
Get Password
94
Validate Password
96
Invalid
Return NACK
100
Disallow Reading
102
Valid
Return ACK
98
Allow Reading
104

Fig. 10

INTERNATIONAL SEARCH REPORT

PCT/US93/01675

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :G06F 12/14, 7/04, 3/06
US CL :380/25,23,3,4,; 235/382.5,382,380/395/600,800
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 395/700,725

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US,A, 4,829,169 (WATANABE) 09 MAY 1989 See figures 3,4; col. 5, lines 28-33 and 50-59; col. 8, lines 55-col. 12, line 16.	1-27
X,P Y,P	US,A, 5,146,499 (GEFFROTIN) 08 SEPTEMBER 1992 See col. 1, lines 28-56; col. 2, line 51-col. 3, line 13; col. 7, lines 1-21, col. 10, lines 60-66	1-6, 8, 9, 13-17, 19, 24-27 7, 10-12, 18, 20-23
Y,P	US,A, 5,120,939 (CLAUS ET AL) 09 JUNE 1992 Figure 1,5; col. 8, line 58-col. 10, line 50.	1-27

[X] Further documents are listed in the continuation of Box C. [ ] See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be part of particular relevance

"E" earlier document published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
03 MAY 1993	27 MAY 1993

Name and mailing address of the ISA/US	Authorized officer
Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	PAUL HARRITY Ngoc-Ho Nguyen NGUYEN NGOC-HO INTERNATIONAL DIVISION
Facsimile No. NOT APPLICABLE	Telephone No. (703) 305-9677

Form PCT/ISA/210 (second sheet)(July 1992)★

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/01675

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A, 5,036,461 (ELLIOTT ET AL) 30 JULY 1991 See figs 4 and 5	1-27
A	US,A, 4,935,962 (AUSTIN) 19 JUNE 1990 Figures 2 and 3	1-27